

|              |
|--------------|
| PROJECT :    |
| TYPE :       |
| ORDERING # : |
| COMMENTS :   |


**PLAYER**



COMPACT FLUORESCENT

**FEATURES**

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- CSA Listed Damp Location For Wall Mount

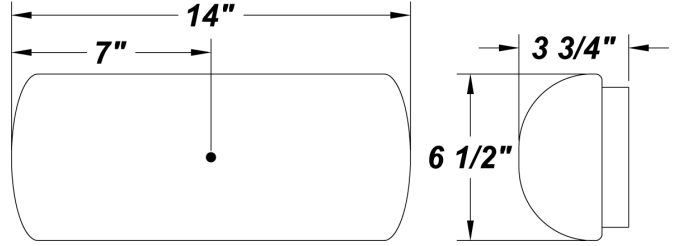

**ORDERING INFORMATION**

Example : (PY218Q - 120E - 41K) White is Standard Finish

| PRODUCT | SOURCE/WATTAGE   | VOLTAGE   | DIFFUSER       | FINISH         | OPTIONS   |
|---------|--|---|----------------|----------------|---|
| Player  | PY113Q - (1) 13W QE<br>PY213Q - (2) 13W QE<br>PY118Q - (1) 18W QE<br>PY218Q - (2) 18W QE<br>PY126Q - (1) 26W QE<br>PY226Q - (2) 26W QE<br>PY132X - (1) 32W TBX | 120E - Electronic<br>277E - Electronic<br>347E - Electronic | Not Applicable | Not Applicable | 41K - 4100K Color Temp.<br>35K - 3500K Color Temp.<br>30K - 3000K Color Temp.<br>27K - 2700K Color Temp.<br>(Standard)<br>DIM - Dimming Ballast<br>F - Fused (Not Available For 347V)<br>TP - Tamper Resistant Screws<br>EBR - Remote Mount Battery<br>(Field Installed)*<br>MSP - Program Start Ballast<br>(Recommended for Motion Sensor) *** |

**REPLACEMENT PARTS** PART NO.

|                    |         |
|--------------------|---------|
| White Acrylic Lens | 3044160 |
|--------------------|---------|

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Emergency Battery Options**  
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet  
**EBR:**  
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F



\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.