

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


DORAL



COMPACT FLUORESCENT

FEATURES

- Luminous White Acrylic Diffuser w/ Brass Plated Vinyl Trim
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- CSA Listed Dry Location For Wall Mount

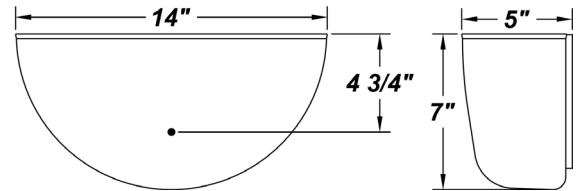

ORDERING INFORMATION

Example : (DL118Q - 120E - PBB - 35K)

Brass Trim is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Doral	DL213 - (2) 13W 2-Pin Biax Magnetic Only DL113Q - (1) 13W QE DL213Q - (2) 13W QE DL118Q - (1) 18W QE DL218Q - (2) 18W QE DL126Q - (1) 26W QE DL226Q - (2) 26W QE	120N - 120V NPF 120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic NOTE: 277V Magnetic NOT Available	Not Applicable	PBB - Brass Trim (Standard) CHB - Chrome Trim WHB - White Trim	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused (Not Available For 347V) EBR - Remote Mount Battery (Field Installed)* TCV - White Acrylic Top Cover PFS - Perforated Top Cover MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS

PART NO.

White Acrylic Lens w/ Brass Trim	3026765
White Acrylic Lens w/ Chrome Trim	3026766
White Acrylic Lens w/ White Trim	3026760

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBR:

Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122 °F
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.