

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


JAVELIN S



COMPACT FLUORESCENT

FEATURES

- Steel Housing w/ Matte Silver Powder Coat Finish
- Steel Mounting Pan w/Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Front & Side Lens Panels
- Open Top
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- ADA Compliant
- CSA Listed Dry Location For Wall Mount

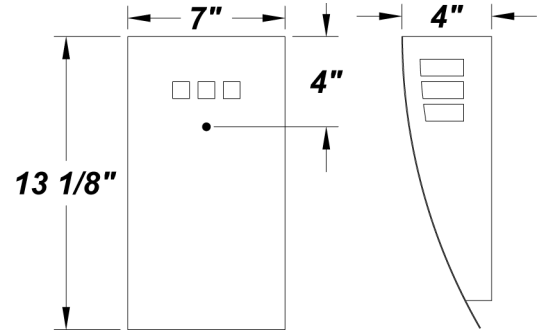

ORDERING INFORMATION

Example : (JAVS - F218Q - 120E - SM - 41K) Matte Silver is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
JAVS					
Javelin S	F113Q - (1) 13W QE F213Q - (2) 13W QE F118Q - (1) 18W QE F218Q - (2) 18W QE F126Q - (1) 26W QE F132X - (1) 32W TBX	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. (Standard) 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. F - Fused (Not Available For 347V) DIM - Dimming Ballast (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)* MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS PART NO.

White Acrylic Lens Set	9606360
------------------------	---------

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBR:
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.