


| |
|--------------|
| PROJECT : |
| TYPE : |
| ORDERING # : |
| COMMENTS : |


OMEGA W

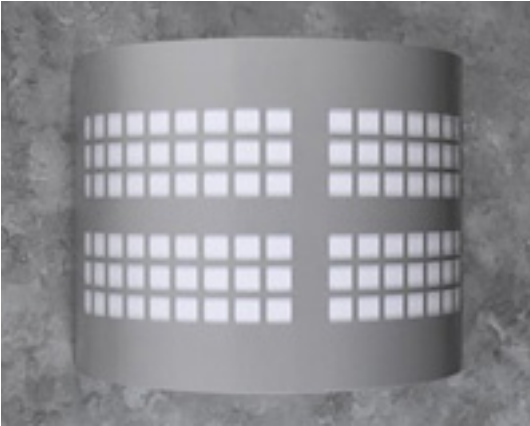

COMPACT FLUORESCENT & HID

FEATURES

- Housing:**
- 18 Gauge Steel w/ Matte Silver Polyester Powder Coat Finish
 - Matte White Acrylic Diffuser
- Internal Fixture:**
- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
 - Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
 - Clear Polycarbonate Diffuser For Fluorescent Wattages
 - Clear Borosilicate Diffuser For HID Wattages
 - Mounts Directly to 4" Junction Box (By Others)
 - Mounting Hardware Included
 - Lamps Included
 - Integral EM Battery Available
 - ETL Listed Wet Location

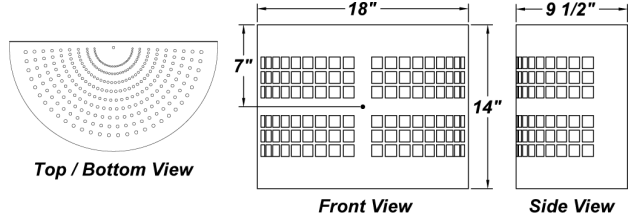

ORDERING INFORMATION

Example : (OMGW - S50 - MTH - SM) Matte Silver is Standard Finish

| PRODUCT | SOURCE/WATTAGE | VOLTAGE | DIFFUSER | FINISH | OPTIONS |
|----------------|--|---|----------------------------|--|--|
| OMGW | | | | | |
| Omega W | M50 - 50W MH M70 - 70W MH M100 - 100W MH S50 - 50W HPS S70 - 70W HPS S100 - 100W HPS F226Q - (2) 26W QE F132X - (1) 32W TBX F142X - (1) 42W TBX F157X - (1) 57W TBX | <u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) <u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - Electronic 120V 277E - Electronic 277V | WAL - White Acrylic | SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory | 41K - 4100K Color Temp.* (Standard on Fluorescent) 35K - 3500K Color Temp.* 27K - 2700K Color Temp.* F - Fused QRS - Quartz Restrike (DC/Bay) QZS - Quartz Socket Only PCL120 - Photocell 120V PCL277 - Photocell 277V EBW / EBC - Integral Emergency Battery** (1x42W Maximum) EBR - Remote Mount Battery (Field Installed)* W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum) MSP - Program Start Ballast (Recommended for Motion Sensor) *** |

REPLACEMENT PARTS PART NO.

| | |
|---------------------------------|---------|
| White Acrylic Lens | 3024260 |
| Housing (Specify Housing Color) | 6035899 |
| Internal Polycarbonate Lens | 34065 |
| Internal Glass Lens (MH & HPS) | 37045 |

NOTES

***Fluorescent Only**
****Emergency Battery Options**
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F
EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

