

ARCHITECTURAL INDOOR

DORAL ADA




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Luminous White Acrylic Diffuser w/ Brass Plated Vinyl Trim
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- ADA Compliant
- ETL Listed Dry Location

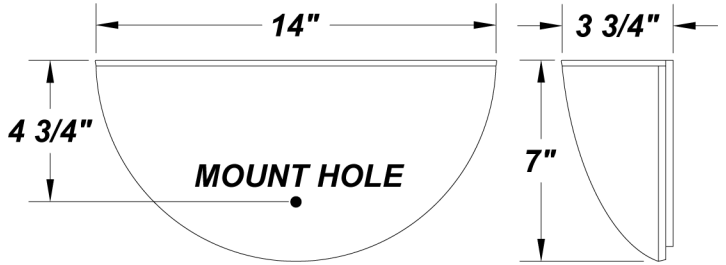

ORDERING INFORMATION

Example : (DLA213Q - 120E - CHB - 27K)

Brass Trim is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Doral ADA	DLA113 - (1) 13W 2-Pin Biax Magnetic Only DLA113Q - (1) 13W QE * DLA213Q - (2) 13W QE * DLA118Q - (1) 18W QE * DLA218Q - (2) 18W QE DLA126Q - (1) 26W QE *	120N - 120V NPF 120E - Electronic 277E - Electronic (Specific Wattages Only)	Not Applicable	PBB - Brass Trim (Standard) CHB - Chrome Trim WHB - White Trim	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused EBR - Remote Mount Battery (Field Installed)* MSP - Program Start Ballast (Recommended for Motion Sensor)***
	* Available in 277V Electronic	NOTE: 277V Magnetic NOT Available			

REPLACEMENT PARTS PART NO.

White Acrylic Lens w/ Brass Trim	3026865
White Acrylic Lens w/ Chrome Trim	3026866
White Acrylic Lens w/ White Trim	3026860

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBR:

- Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F
- Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT Compliant

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.