


**BRONZE CUP LG LED**



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Prismatic Borosilicate Glass Lens
- Permlight BB90WB 48W LED Module
- Thomas Research LED50W-48-C1050 50W LED Driver
- Surge Protector
- Fully Gasketed
- Stainless Steel Zinc-Coated Screws
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Cast-In Template
- Ideal For Stairwell And Passageway Lighting
- CSA Listed Wet Location For Wall Mount
- L70 Life Time For 50,000hr

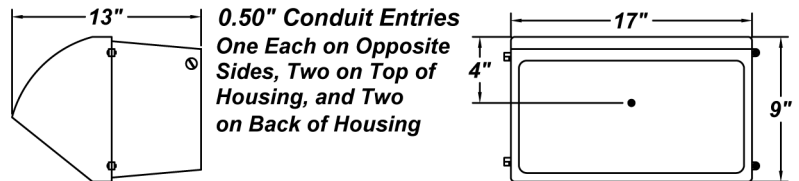

**ORDERING INFORMATION**

Example : (BPL - L48.0 - 120 - 277V - CGL - SW - 50K)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Bronze Cup Lg	L48.0 - 48W LED Module	120 - 277V	CGL - Clear Glass Lens (Standard)	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	40K - 4000K Color Temperature 50K - 5000K Color Temperature MS - Motion Sensor (Can be Used w/ "SDIM" Option) PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimmable Driver (0 - 10V) SDIM - Step-Dimmable Driver (Dimmable to 25% & 50%) PDIM - Pulse Width Dimmable Driver (0 - 10V) F - Fused EBW - Bodine BSL23 - Will light Two 5.5W LED Strips - Average 340 Source Lumens EBC - Bodine BSL10 - Will light Two 5.5W LED Strips - Estimated 1236 Source Lumens  <b>Please Note: 120V or 277V Must Be Specified When Ordering The EB Option</b>

**REPLACEMENT PARTS**

**PART NO.**

Clear Tempered Glass Diffuser

370342

**ARRA 2009**



**BUY AMERICA ACT** C US

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	40K SPECIFICATIONS	50K SPECIFICATIONS
<b>Bronze Cup LG LED</b>	<b>L48.0 - (1) 48W LED Board</b>	<b>LED Specifications</b> - 90 LEDs Per Strip - SW50Bin, Color Temp = 4000K Nominal - Constant Current at 1050mA by Driver - 80 CRI typ. (75 CRI min) 5368 Lumens - 58W Input = Estimated 93 Lumens Per Watt	<b>LED Specifications</b> - 90 LEDs Per Strip - SW50Bin, Color Temp = 5000K Nominal - Constant Current at 1050mA by Driver - 80 CRI typ. (75 CRI min) 5650 Lumens - 58W Input = Estimated 97 Lumens Per Watt

