

**GARCIA**




LINEAR FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser w/ White End Caps
- Mounts Directly to Ceiling w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available
- Lamps Not Included
- ADA Compliant
- ETL Listed Damp Location

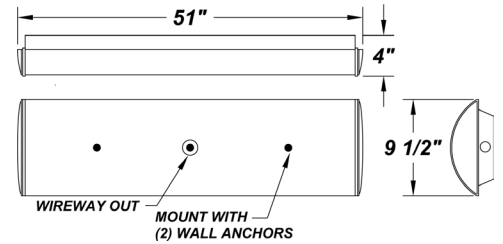

**ORDERING INFORMATION**

Example : (GA48232E - 120E)

White Acrylic Lens w/ White End Caps is Standard

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Garcia	GA48232E - (2) 32W T8	120E - 120V Electronic 277E - 277V Electronic	Not Applicable	Not Applicable	F - Fused EB - Integral Emergency Battery EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery DIM - Dimming Ballast MSP - Program Start Ballast (Recommended for Motion Sensor) ***

**REPLACEMENT PARTS**

**PART NO.**

48" White Acrylic Diffuser w/ White Marble End Caps 3027760

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



**NOTES**

**\*\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:** Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F  
**EBR:** Bodine's B30 (T8 Electronic) - Temperature Rating (Ambient) 41° F - 122° F

\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.