

BUNKER




COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Fully Silicone Gasketed Channel
- Clear Prismatic UV-Stabilized Polycarbonate Ribbed Lens
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available (2x26W Maximum Wattage)
- Fluorescent Wattages Are CSA Listed
- MH Wattages are CSA Listed Wet Location For Wall Mount or Ceiling Mount With The Following Restrictions: 150W MH May Include Photocell or 50W Quartz Lamp

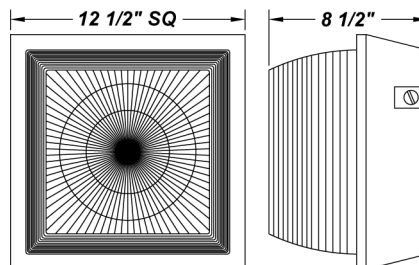

**Three 0.50" Conduit Entry Points on Sides
One 0.50" Conduit Entry Point on Back**

ORDERING INFORMATION

Example : (BK232X - 120E - TB)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Bunker	BK50MH - 50W MH BK70MH - 70W MH BK100MH - 100W MH BK150MH - 150W MH	METAL HALIDE (MH) 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast * (Electronic Only) QRS - Quartz Restrike (DC/Bay - Lamp Included) QRZ - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	BK50 - 50W HPS BK70 - 70W HPS BK100 - 100W HPS BK150 - 150W HPS	HPS 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap)			
	BK218Q - (2) 18W QE BK226Q - (2) 26W QE BK132X - (1) 32W TBX BK232X - (2) 32W TBX BK142X - (1) 42W TBX BK242X - (2) 42W TBX BK157X - (1) 57W TBX	FLUORESCENT (F) 120E - 120V Electronic 277E - 277V Electronic			

REPLACEMENT PARTS

PART NO.

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Fluorescent Only**

****Emergency Battery Options (2x26W Maximum Wattage)**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

