

DiMARCO




LINEAR FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel End Caps w/ Matte Silver Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Lamps Not Included
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

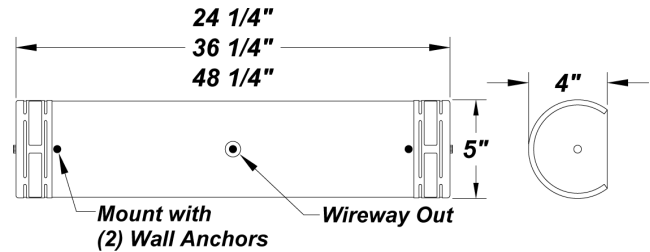

ORDERING INFORMATION

Example : (DM24217E - 120E)

Matte Silver is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
DM24 (24 1/4" Fixture)	DM24117E - (1) 17W T8 DM24217E - (2) 17W T8 DM24214E - (2) 14W T5 DM24224E-HO* - (2) 24W T5	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White KC - Kenworth Chrome RAL Colors or Custom Match - Consult Factory	F - Fused (Not Available For 347V) EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only) DIM - Dimming Ballast (T8 Lamping Only) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
DM36 (36 1/4" Fixture)	DM36125E - (1) 25W T8 DM36225E - (2) 25W T8 DM36221E - (2) 21W T5 DM36239E-HO* - (2) 39W T5	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic			
DM48 (48 1/4" Fixture)	DM48132E - (1) 32W T8 DM48232E - (2) 32W T8 DM48228E - (2) 28W T5 DM48254E-HO* - (2) 54W T5 HO* - HIGH OUTPUT	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic			

REPLACEMENT PARTS

PART NO.

24" White Acrylic Diffuser	3018160
36" White Acrylic Diffuser	3018560
48" White Acrylic Diffuser	3012960

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B50 (T8 Electronic) - Temperature Rating (Ambient) 32° F - 131° F

Bodine's B550LP (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

EBR:

Bodine's B30 (T8 Electronic) - Temperature Rating (Ambient) 41° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

ARRA 2009



BUY AMERICA ACT

