

**EAGLE**




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (14" & 19" Fixtures Only) (Back Box Required) (Slotted Back Box For 19" Fixtures Only) (Damp Location Only)
- ADA Compliant (11" & 14" Fixtures Only)
- CSA Listed Wet Location For Wall or Ceiling Mount
- CSA Listed Damp Location For Wall or Ceiling Mount w/ EBW/BB Option

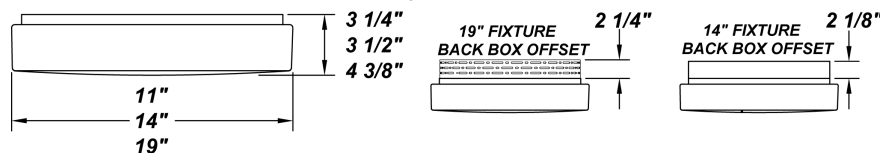

**ORDERING INFORMATION**

Example : (EE226Q - 120E - SM - 35K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Eagle 11" Fixture (10" Housing)	EE113Q - (1) 13W QE	120E - Electronic 120V	WAL - White Acrylic (Standard) WPL - White Polycarbonate	WH - Gloss White (Standard) SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused (Not Available For 347V) TP - Tamper Resistant Screws DIM - Dimming Ballast * (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)** EBW/BB - Integral Emergency Battery** (Back Box Required) BB - Back Box for 14" or 19" Fixture W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) ALP - Aluminum Mount Pan MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	EE213Q - (2) 13W QE	277E - Electronic 277V			
	EE118Q - (1) 18W QE	347E - Electronic 347V			
	EE126Q - (1) 26W QE				
Eagle 14" Fixture (12" Housing)	EE218Q - (2) 18W QE	120E - Electronic 120V			
	EE226Q - (2) 26W QE	277E - Electronic 277V			
		347E - Electronic 347V			
Eagle 19" Fixture (17" Housing)	EE413Q - (4) 13W QE	120E - Electronic 120V			
	EE326Q - (3) 26W QE	277E - Electronic 277V 347E - Electronic 347V			

**REPLACEMENT PARTS**

**PART NO.**

11" White Acrylic Diffuser	3011360
14" White Acrylic Diffuser	3011560
19" White Acrylic Diffuser	3011960
10" White Polycarbonate Diffuser	3411160
14" White Polycarbonate Diffuser	3411660
19" White Polycarbonate Diffuser	3412060

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*Fluorescent Only**

**\*\*Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EBW:** Bodine's B213 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F  
Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

**EBR:** Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F  
Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT

Compliant

RECYCLABLE

SA

\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.