


PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**GOLD CUP MD LED**



**FEATURES**

- Cast Aluminum Housing w/ Textured Polyester Bronze Powder Coat Finish
- Ribbed Borosilicate Glass Diffuser
- Perlight BB66WA 35W LED Module
- Antron AC-50CDI.4UV-TS 50W LED Driver
- Surge Protector
- Fully Gasketed
- Stainless Steel Zinc-Coated Screws
- Mounts Direct to Flat Surface w/ Four #8 Wall Anchors (Not Included)
- Cast-In Template
- CSA Listed Wet Location For Wall Mounting
- L70 Life Time For 50,000hr

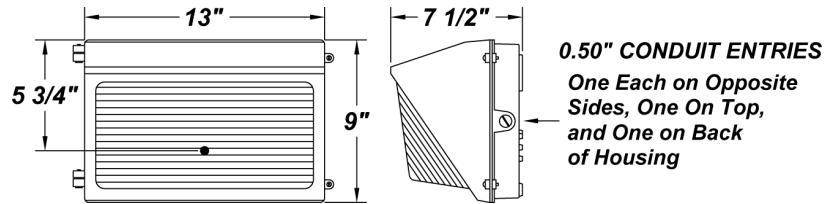

**ORDERING INFORMATION**

Example : (GPM - L35.0 - 100 - 277V - CGL - TB - 50K) Textured Bronze is Standard Finish

GPM	PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
	Gold Cup Md	L35.0 - 35W LED Module	100 - 277V  Please See "Options" Column For Driver Specifications	CGL - Clear Glass Lens (Standard)	<b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>40K</b> - 4000K Color Temperature <b>50K</b> - 5000K Color Temperature  <b>DIM</b> - Dimmable Driver (0 - 10V) <b>SDIM</b> - Step-Dimmable Driver (Dimmable to 25% & 50%) <b>PDIM</b> - Pulse Width Dimmable Driver (0 - 10V)  <b>PCL</b> - Photocell 120/277V <b>LXS</b> - Lexan Lens Shield <b>VS</b> - Internal Cut-off Visor <b>WGD</b> - Steel Wire Guard <b>TP</b> - Tamper-Proof Screw Set <b>F</b> - Fused  <b>EB</b> - Bodine BSL23 - Will light Two 5.5W LED Strips - Average 340 total Lumens <b>Please Note: 120V or 277V Must Be Specified When Ordering The EB Or PCL Options See Page 2 For Wattage Specifications</b>

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**REPLACEMENT PARTS** **PART NO.**

Ribbed Borosilicate Glass Diffuser	37127
Frosted Ribbed Borosilicate Glass Diffuser	3712762
Internal Visor (Please Specify Color When Ordering)	5300799





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	40K SPECIFICATIONS	50K SPECIFICATIONS
Gold Cup MD LED	L35.0 - (1) 35W LED Board	<b>LED Specifications</b> - 66 LEDs Per Strip - SW50Bin, Color Temp = 4000K Nominal - Constant Current at 1050mA by Driver - 80 CRI typ. (75 CRI min) 3990 Lumens - 41W Input = Estimated 97 Lumens Per Watt	<b>LED Specifications</b> - 66 LEDs Per Strip - SW50Bin, Color Temp = 5000K Nominal - Constant Current at 1050mA by Driver - 80 CRI typ. (75 CRI min) 4200 Lumens - 41W Input = Estimated 102 Lumens Per Watt

