

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


**PINSEEKER SQ**



COMPACT FLUORESCENT

**FEATURES**

- Polycarbonate Housing w/ Black Finish
- Injection Molded White Polycarbonate Lens
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Fully Gasketed Lens Channel
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- CSA Listed Wet Location For Wall or Ceiling Mount
- ADA Compliant

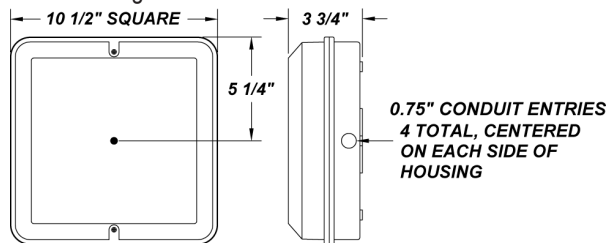

**ORDERING INFORMATION**

Example : (PRS118Q - 277E - 35K) Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Pinseeker Sq	PRS113Q - (1) 13W QE PRS118Q - (1) 18W QE PRS126Q - (1) 26W QE PRS213Q - (2) 13W QE PRS218Q - (2) 18W QE (120V Only - Robertson RSO218CQ120 Ballast Required) PRS226Q - (2) 26W QE (120V Only - Robertson RSO226CQ120 Ballast Required)	120E - Electronic 120V 277E - Electronic 277V 347E - Electronic 347V	Not Applicable	BK - Black (Standard) WH - White  <b>Note: Custom Colors            Are Not Available</b>	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) TP - Tamper Resistant Screws PCL - Photocell MSP - Program Start Ballast (Recommended for Motion Sensor) ***

**REPLACEMENT PARTS** PART NO.

White Polycarbonate Diffuser	3427060
------------------------------	---------

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.



\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.