

CALCUTTA CA




COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Prismatic Ribbed Borosilicate Glass Lens
- Steel Ballast Housing
- Alanod Aluminum Reflector
- Fully Gasketed Channel
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Not Included
- Lamps Included
- Electronic And MH Wattages Are CSA Listed Wet Location For Wall Mount

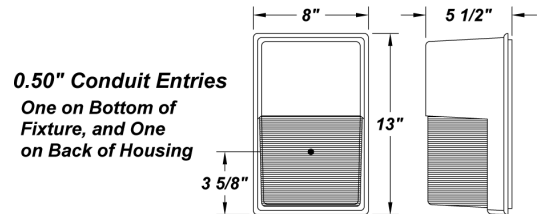

ORDERING INFORMATION

Example : (CAC132X - 120E - 27K) Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Calcutta CA	CAC50MH - (1) 50W MH CAC70MH - (1) 70W MH CAC100MH - (1) 100W MH CAC50 - (1) 50W HPS CAC70 - (1) 70W HPS CAC100 - (1) 100W HPS CAC226X - (2) 26W TBX CAC132X - (1) 32W TBX CAC232X - (2) 32W TBX (Antron CSD-UV32PSX Ballast Only - No Exceptions) CAC142X - (1) 42W TBX CAC242X - (2) 42W TBX (Antron CSD-UV42PS Ballast Only - No Exceptions)	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - MT HPF (Wired 347V) <u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - Electronic 120V 277E - Electronic 277V 347E - Electronic 347V	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) PCL - Photocell F - Fused (Not Available For 347V) TP - Tamper Resistant Screws WGD - Wire Guard MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS PART NO.

Replacement Clear Glass Diffuser	37027
----------------------------------	-------

NOTES

***Fluorescent Only**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

