


PROJECT :
TYPE :
ORDERING # :
COMMENTS :


NICKLAUS

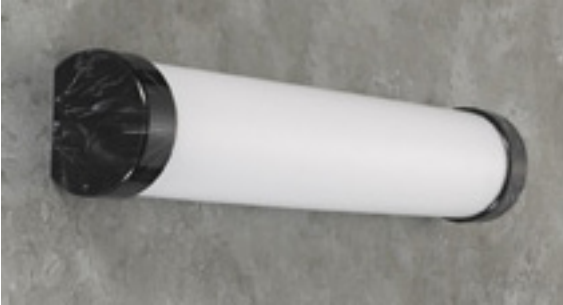

LINEAR FLUORESCENT

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser w/ Black Marble Acrylic End Caps
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available
- Lamps Not Included
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

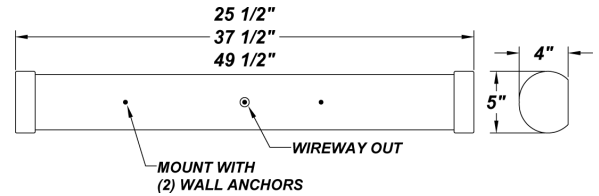

ORDERING INFORMATION

Example : (NS36225E - 120E) Black Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Nicklaus 25 1/2" Fixture	NS24117E - (1) 17W T8	120E - 120V Electronic	Not Applicable	Optional End Cap Colors Available - Consult Factory For Details and Pricing	F - Fused (Not Available For 347V) EB - Integral Emergency Battery (3' & 4' Only) (3' Available in T8 Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only) DIM - Dimming Ballast (T8 Lamping Only) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	NS24217E - (2) 17W T8	277E - 277V Electronic			
	NS24214E - (2) 14W T5	347E - 347V Electronic			
	NS24224E-HO* - (2) 24W T5				
Nicklaus 37 1/2" Fixture	NS36125E - (1) 25W T8	120E - 120V Electronic	Not Applicable	Optional End Cap Colors Available - Consult Factory For Details and Pricing	F - Fused (Not Available For 347V) EB - Integral Emergency Battery (3' & 4' Only) (3' Available in T8 Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only) DIM - Dimming Ballast (T8 Lamping Only) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	NS36225E - (2) 25W T8	277E - 277V Electronic			
	NS36221E - (2) 21W T5	347E - 347V Electronic			
	NS36239E-HO* - (2) 39W T5				
Nicklaus 49 1/2" Fixture	NS48132E - (1) 32W T8	120E - 120V Electronic	Not Applicable	Optional End Cap Colors Available - Consult Factory For Details and Pricing	F - Fused (Not Available For 347V) EB - Integral Emergency Battery (3' & 4' Only) (3' Available in T8 Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only) DIM - Dimming Ballast (T8 Lamping Only) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	NS48232E - (2) 32W T8	277E - 277V Electronic			
	NS48228E - (2) 28W T5	347E - 347V Electronic			
	NS48254E-HO* - (2) 54W T5				
HO* - HIGH OUTPUT					

REPLACEMENT PARTS PART NO.

24" White Acrylic Diffuser w/ Black Marble End Caps	3017051
36" White Acrylic Diffuser w/ Black Marble End Caps	3017251
48" White Acrylic Diffuser w/ Black Marble End Caps	3017151

NOTES

****Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:
Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
Bodine's B550LP (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

