

PLAYER II




LINEAR FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Lamps Not Included
- CSA Listed Damp Location For Surface Mount

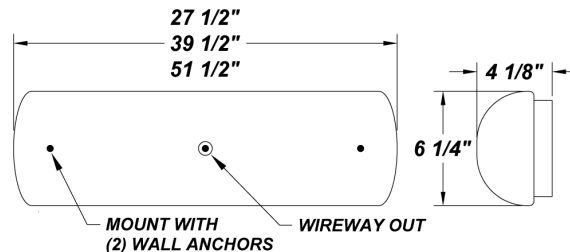

ORDERING INFORMATION

Example : (PY36225E - 120E)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
PY24 (24" Fixture)	PY24117E - (1) 17W T8	120E - 120V Electronic	Not Applicable	Not Applicable	F - Fused (Not Available For 347V) TP - Tamper Resistant Screws EB - Integral Emergency Battery (3' and 4' Only)** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only)
	PY24217E - (2) 17W T8	277E - 277V Electronic			
	PY24214E - (2) 14W T5	347E - 347V Electronic			
PY36 (36" Fixture)	PY36125E - (1) 25W T8	120E - 120V Electronic	Not Applicable	Not Applicable	F - Fused (Not Available For 347V) TP - Tamper Resistant Screws EB - Integral Emergency Battery (3' and 4' Only)** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only)
	PY36225E - (2) 25W T8	277E - 277V Electronic			
	PY36221E - (2) 21W T5	347E - 347V Electronic			
PY48 (48" Fixture)	PY48132E - (1) 32W T8	120E - 120V Electronic	Not Applicable	Not Applicable	F - Fused (Not Available For 347V) TP - Tamper Resistant Screws EB - Integral Emergency Battery (3' and 4' Only)** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only)
	PY48232E - (2) 32W T8	277E - 277V Electronic			
	PY48228E - (2) 28W T5	347E - 347V Electronic			

REPLACEMENT PARTS

PART NO.

24" White Acrylic Diffuser	3044260
36" White Acrylic Diffuser	3044360
48" White Acrylic Diffuser	3044460

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

ARRA 2009



BUY AMERICA ACT



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.