

INSTALLATION & MAINTENANCE INSTRUCTIONS FOR THE

HERITAGE & HERITAGE OVAL



NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

HERITAGE ROUND
J-BOX PATTERN


HERITAGE OVAL
J-BOX PATTERN

CALCUTTA INSTALLATION

- 1] Remove any excess packing from the fixture.
- 2] Remove 2 screws securing the housing to the mount pan, and set it aside.
- 3] On the inside of the mount pan, there is a J-Box pattern. Measure and drill the proper holes on the J-box pattern in order to properly mount the fixture.
- 4] Remove the screw-in conduit plug on the mount pan. Pull the wires from the J-Box through the conduit hole, then secure the mount pan to the J-Box with two screws. (Not provided)
- 5] Connect the fixture leads to the supply leads. TLI stipulates the Black as Line; White as Common; Bare/Green as Ground.
- 6] Check the re-lamp label to ensure that the lamp is the specified wattage. Install lamp(s), then restore power to the fixture to ensure that the lamps are igniting.
- 7] Re-secure the reflector, and then re-secure the housing..
- 8] The Heritage Round & Oval must be caulked with a suitable waterproof sealant across the top, and at least 2" down each side of the fixture to properly seal it to the mounting surface. A small space should be open at the bottom for excess moisture runoff.

MAINTENANCE

The lens should be cleaned once every 6 months. Repeat the above procedures in reverse to remove the lens. It must be washed in a mild soap solution. DO NOT use cleansers containing bleach. Re-assemble the fixture.
The metal portion of the fixture can be wiped clean as needed using a mild soap solution.
ATTENTION: Avoid moving any exposed wires. If any wires are accidentally disconnected, call a professional to repair.

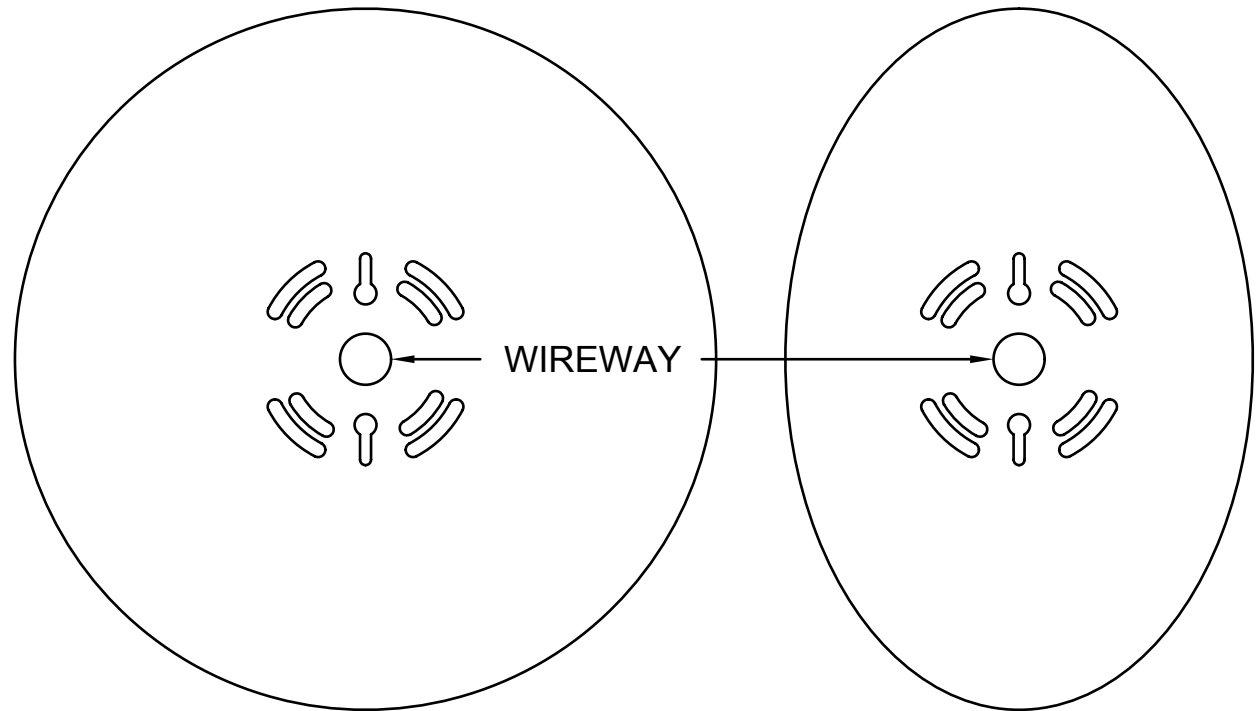

These instructions are general to the fixtures noted.
Due to the numerous options, all variations may not be covered.

Installation of an electrical luminaire must be performed by a qualified professional. The fixture must be wired in accordance to all local & national electrical codes.