

DRIVER




Textured Bronze Finish Shown

COMPACT FLUORESCENT & HID

FEATURES

- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Prismatic Ribbed Molded Polycarbonate Lens For Fluorescent Wattages
- Clear Prismatic Ribbed Molded Borosilicate Glass Lens For HID Wattages
- Fully Gasketed
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available (1x42W Maximum)
- ETL Listed Wet Location
- MH Wattages Are CSA Listed For Wall Mounting
- Electronic Wattages Are CSA Listed For Wall Mounting up to 2x26W, Including EB & SH / SHH Options

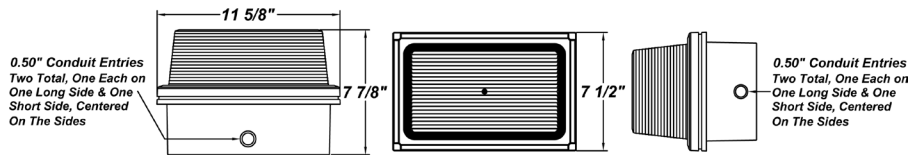

ORDERING INFORMATION

Example : (DR226Q - 120E - 41K)

Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Driver	DRH50MH - 50W MH DRH70MH - 70W MH DRH100MH - 100W MH DRH50 - 50W HPS DRH70 - 70W HPS DRH100 - 100W HPS DR213Q - (2) 13W QE DR118Q - (1) 18W QE DR218Q - (2) 18W QE DR126Q - (1) 26W QE DR226Q - (2) 26W QE DR132X - (1) 32W TBX DR142X - (1) 42W TBX DR157X - (1) 57W TBX	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - 347V HPF <u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast* (Electronic Only) QRS - Quartz Restrike (DC/Bay - Lamp Included) QZS - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed)** SH - Full Shield (Fluorescent Only) SHH - Half Shield (Fluorescent Only) W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) MSP - Program Start Ballast (Recommended for Motion Sensor)***

REPLACEMENT PARTS

PART NO.

Clear Polycarbonate Diffuser	34065
Clear Borosilicate Glass Diffuser	37045

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



NOTES

*Fluorescent Only

**Emergency Battery Options (1x42W Maximum)

Initial light output in Emergency mode will last for a minimum of 90 minutes.

1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.