

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


ECLIPSE S



COMPACT FLUORESCENT

FEATURES

- 18 Gauge Steel Fascia w/ Matte Silver Powder Coat Finish
- Luminous White Acrylic w/ White Perf Covering Lens Panel
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Open Top and Bottom
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- ADA Compliant
- CSA Listed Dry Location For Wall Mount

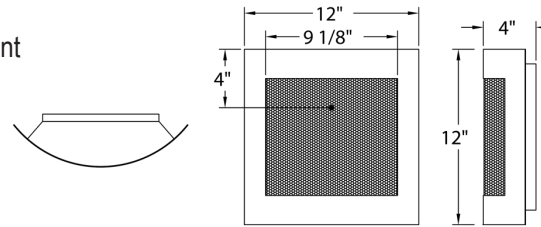

ORDERING INFORMATION

Example : (ECLS - F226Q - 120E - PWL - SM - 41K) Matte Silver is Standard Finish

ECLS					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Eclipse S	F213E - (2) 13W 4-Pin Biax F218Q - (2) 18W QE F226Q - (2) 26W QE	120E - Electronic 277E - Electronic 347E - Electronic	PWL - White Acrylic w/ White Mylar Perf (Standard) WAL - White Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. (Standard) 35K - 3500K Color Temp. (Not Available For F213E) 30K - 3000K Color Temp. 27K - 2700K Color Temp. F - Fused (Not Available For 347V) DIM - Dimming Ballast (QE Electronic Only) TCV - Clear Acrylic End Cover TBC - Clear Acrylic Top & Bottom End Covers EBR - Remote Mount Battery (Field Installed)* MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS PART NO.

White Perf Acrylic Lens	3098060
White Acrylic Lens	3097660

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBR:
Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.