



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

HERITAGE OVAL

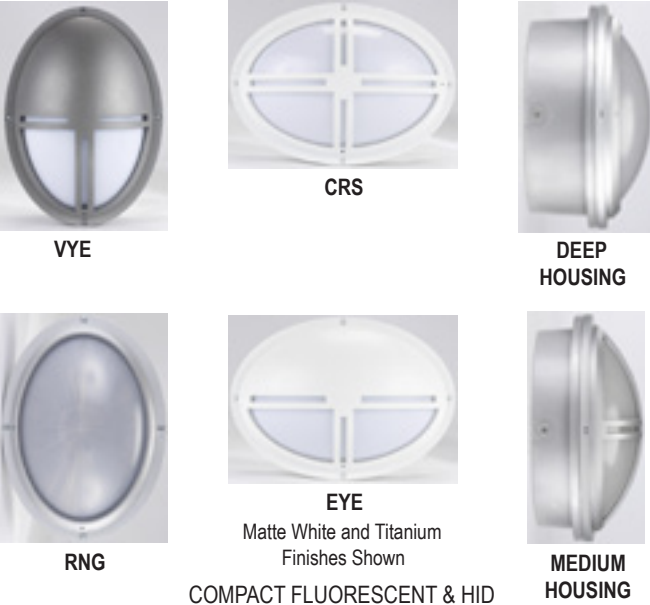

FEATURES

- Die-Cast, Marine Grade Aluminum Housing
- Injection Molded Polycarbonate Fascia w/ Weep Holes
- Translucent White Injection Molded, UV-Stabilizing Polycarbonate Diffuser
- 0.040" Aluminum Reflector Plate w/ Hi-Reflectance White Powder Coat Finish
- Extruded, EPMD Ribbed / Foam Rubber Gasketing
- Junction Box Pattern on Housing For Easy Mounting
- Lamps Included
- Wet Location
- Metal Halide (MH) Wattages Are CSA Listed Wet Location For Wall Mounting
- Electronic Wattages Are CSA Listed Wet Location For Wall Mounting, Including Photocell

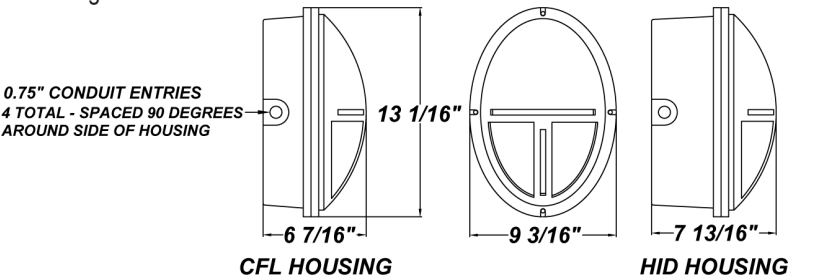

ORDERING INFORMATION

Example : (HRO118Q - 120E - BK - 41K)

PRODUCT	SOURCE/WATTAGE	VOLTAGE	FASCIA/DIFFUSER	FINISH	OPTIONS
Heritage Oval (Medium Housing)	HRO113Q - (1) 13W QE	FLUORESCENT (F) 120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	CRS - Cross Guard Fascia EYE - Eyelid Guard Fascia RNG - Open Guard Fascia VYE - Vertical Eyelid Guard Fascia	BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V TP - Tamper Resistant Screws DIM - Dimming Ballast * (QE Electronic Only) EBR - Remote Mount Battery (Field Installed)* MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	HRO118Q - (1) 18W QE				
	HRO126Q - (1) 26W QE				
	HRO126X - (1) 26W TBX				
	HRO132X - (1) 32W TBX				
	HRO142X - (1) 42W TBX				
Heritage Oval (Deep Housing)	HRO35MH - (1) 35W MH	METAL HALIDE (MH) 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - 347V HPF	WHL - White Diffuser (Standard) FRL - Frosted Ribbed Diffuser		
	HRO50MH - (1) 50W MH				
Heritage Oval (Deep Housing)	HRO35 - (1) 35W HPS	HPS 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap)			
	HRO50 - (1) 50W HPS				

REPLACEMENT PARTS PART NO.

White Polycarbonate Diffuser	3408660
Frosted Ribbed Polycarbonate Diffuser	3408662
Clear Ribbed Polycarbonate Diffuser	34086

NOTES

***Fluorescent Only**
****Emergency Battery Options (Deep Housing Required)**
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.



We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.