


MASTERS LARGE

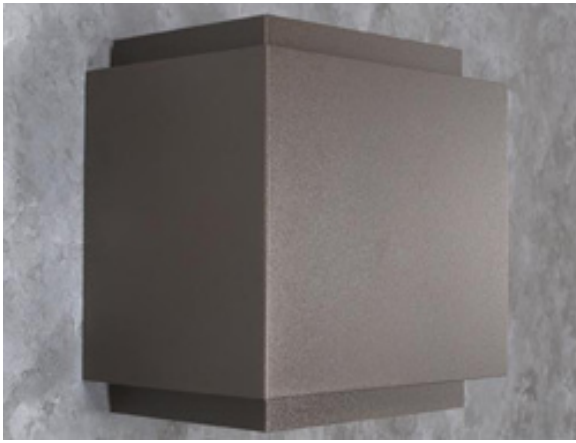


COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Trim Bands w/ Textured Bronze Powder Coat Finish
- Standard Up / Down Light Output
- **Internal Fixture:**
- Die-Cast Aluminum Ballast Housing w/ Textured Bronze Powder Coat Finish
- Fully Silicone Gasketed Channel
- Clear Prismatic UV-Stabilized Polycarbonate Ribbed Lens
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available (2x32W Maximum Wattage)
- Fluorescent Wattages Are CSA Listed
- MH Wattages are CSA Listed Wet Location For Wall Mount or Ceiling Mount With The Following Restrictions: 150W MH May Include Photocell or 50W Quartz Lamp

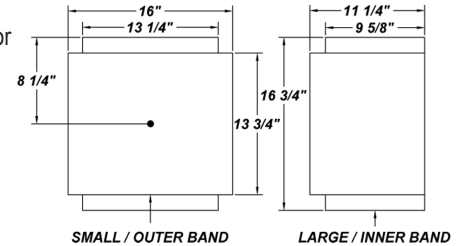

ORDERING INFORMATION

Example : (MSL150MH - MTH - SM)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Masters Large	<p>MSL50MH - 50W MH MSL70MH - 70W MH MSL100MH - 100W MH MSL150MH - 150W MH</p> <p>MSL50 - 50W HPS MSL70 - 70W HPS MSL100 - 100W HPS MSL150 - 150W HPS</p> <p>MSL218Q - (2) 18W QE MSL226Q - (2) 26W QE MSL132X - (1) 32W TBX MSL232X - (2) 32W TBX MSL142X - (1) 42W TBX MSL242X - (2) 42W TBX MSL157X - (1) 57W TBX</p>	<p><u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)</p> <p><u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V)</p> <p>(MT - Multi-Tap)</p> <p><u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic</p>	Not Applicable	<p>SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White</p> <p>RAL Colors or Custom Match - Consult Factory</p>	<p>41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast * (Electronic Only) QRS - Quartz Restrike (DC/Bay - Lamp Included) QRZ - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum) MSP - Program Start Ballast (Recommended for Motion Sensor) ***</p>

REPLACEMENT PARTS

PART NO.

Clear Polycarbonate Lens

34195

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

*Fluorescent Only

**Emergency Battery Options (2x32W Maximum Wattage)

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

ARRA 2009



BUY AMERICA ACT

