

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


MAXFLI



COMPACT FLUORESCENT

FEATURES

- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Clear Ribbed Polycarbonate Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available (Back Box Required)
- ADA Compliant
- CSA Listed Wet Location For Wall or Ceiling Mount

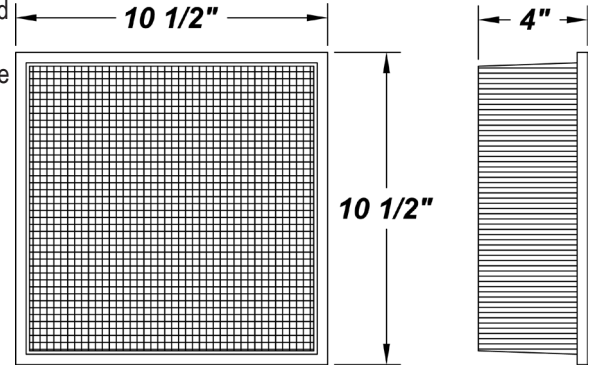

ORDERING INFORMATION

Example : (Mi226Q - 120E - WPL - 41K) White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Maxfli	Mi213 - (2) 13W PL 2-Pin Biax Magnetic (120V Only) Mi113Q - (1) 13W QE Mi213Q - (2) 13W QE Mi118Q - (1) 18W QE Mi218Q - (2) 18W QE Mi126Q - (1) 26W QE Mi226Q - (2) 26W QE Mi132X - (1) 32W TBX Mi142X - (1) 42W TBX	120N - 120V NPF Magnetic 120E - Electronic 120V 277E - Electronic 277V 347E - Electronic 347V	CPL - Clear Polycarbonate (Standard) WPL - White Polycarbonate	Not Applicable	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) TP - Tamper Resistant Screws EBR - Remote Mount Battery (Field Installed)* EBW/BB - Integral Emergency Battery** (Back Box Required) BB - Back Box WPL - White Polycarbonate Diffuser W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) PCL - Photocell (Back Box Required) MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS PART NO.

Clear Polycarbonate Diffuser	34191
White Polycarbonate Diffuser	3419160

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options (Back Box Required)**
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:
 Bodine's B213 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F
 Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBR:
 Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F
 Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

