



**MUIRFIELD FLUORESCENT**



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Steel End Caps w/ White Powder Coat Finish
- Clear Acrylic Lens w/ Ribbed Sides and Prismatic Front
- Mounts Directly to Wall or Ceiling w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only) (120-277V Only)
- Convenience Outlet & Pull Chain Available
- Lamps Not Included
- CSA Listed Damp Location

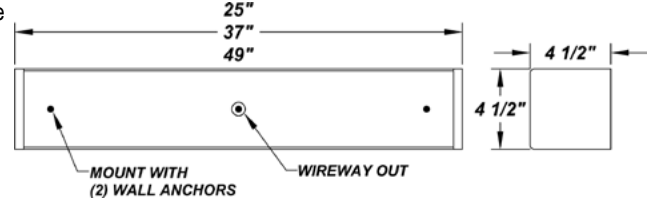

**ORDERING INFORMATION**

Example : (MD48232E - 120E - SM - CO - EB)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
<b>Muirfield 24" Fixture</b>	MD24117E - (1) 17W T8 MD24217E - (2) 17W T8 MD24114E - (1) 14W T5 MD24214E - (2) 14W T5 MD24124E - HO - (1) 24W T5 MD24224E - HO - (2) 24W T5	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	Not Applicable	WH - Gloss White (Standard) CH - Chrome Plated SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White <b>RAL Colors or Custom Match - Consult Factory</b>	CO - Convenience Outlet (120V Only) F - Fused (120-277V Only) MSW - Multi-Lamp Switch w/ Pull Chain for Multi-Directional Light (120V Only) (MS2B Required) 2SW - Power Switch w/ Pull Chain (For On / Off Lighting) (120V Only) MS2B - Two ballasts for Up and/or Down light operation (intended for DL and MSW Options) EB - Integral Emergency Battery** (3' and 4' Only) (120-277V Only) EBR - Remote Mount Battery** (Field-Installed) (3' and 4' Only) (120-277V Only) W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only) DL - Internal Divider For Multi-Directional Up / Down Light MSP - Program Start Ballast BFL - Front Baffle For Up and Down Lighting NLT - 9W PL Magnetic Night Light (Available for 1-Lamp Fixtures Only) (120V Only)
<b>Muirfield 36" Fixture</b>	MD36125E - (1) 25W T8 MD36225E - (2) 25W T8 MD36121E - (1) 21W T5 MD36221E - (2) 21W T5 MD36139E - HO - (1) 39W T5 MD36239E - HO - (2) 39W T5	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic			
<b>Muirfield 48" Fixture</b>	MD48132E - (1) 32W T8 MD48232E - (2) 32W T8 MD48128E - (1) 28W T5 MD48228E - (2) 28W T5 MD48154E - HO - (1) 54W T5 MD48254E - HO - (2) 54W T5	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic			

**REPLACEMENT PARTS**

**PART NO.**

24" Clear Acrylic Diffuser	30909
36" Clear Acrylic Diffuser	30907
48" Clear Acrylic Diffuser	30904

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

**NOTES**

**\*\*Emergency Battery Options (120 - 277V Only)**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

**EB1:** Bodine's B90 (Electronic) - Temperature Rating (Ambient) 32° F - 122° F (Runs 1 T8 Lamp)

**EB2:** Bodine's B50 (Electronic) - Temperature Rating (Ambient) 32° F - 122° F (Runs 2 T8, 1 T5 or 1 T5HO Lamp) (T5HO for Wall Mount Only)

**EBR:** Bodine's B30 (T8 Electronic) - Temperature Rating (Ambient) 32° F - 122° F (Remote Mount for T8 or T5 Lamping / Runs 2 T8, 1 T5 or 1 T5HO Lamp)



BUY AMERICA ACT C US