


OMEGA S

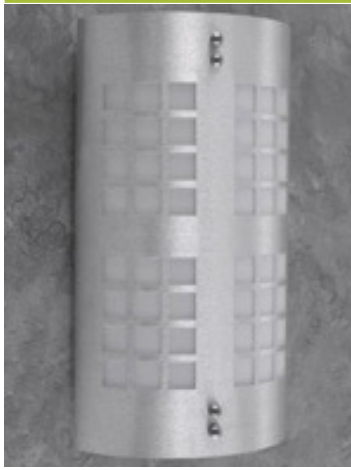


COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Brushed Aluminum Fascia w/ Clear Coat Powder Coat Finish
- Matte White Acrylic Diffuser
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Top & Bottom Perforated Covers w/ Clear Coat Powder Coat Finish
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available
- ADA Compliant
- CSA Listed Dry Location For Wall Mount

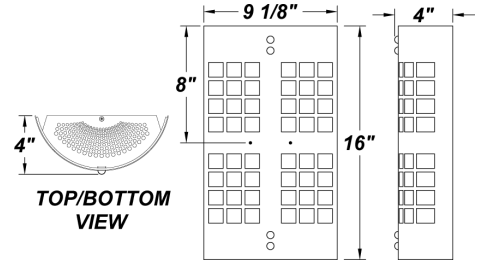

ORDERING INFORMATION

Example : (OMGS - F218Q - 120E - WAL - AL - 35K)

Brushed Aluminum is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Omega S	F213E - (2) 13W 4-Pin Biax F218Q - (2) 18W QE F226Q - (2) 26W QE	120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic	PSL - White Acrylic w/ Silver Mylar Perf (Standard) WAL - White Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. (Standard) 35K - 3500K Color Temp. (Not Available For F213E) 30K - 3000K Color Temp. 27K - 2700K Color Temp. F - Fused (Not Available For 347V) DIM - Dimming Ballast (QE Electronic Only) EBW - Integral Emergency Battery* EBR - Remote Mount Battery (Field Installed)* W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS

PART NO.

White Acrylic Lens

3015660

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**

Initial light output in emergency mode will last for a minimum of 90 minutes. 1 Lamp wired unless specified otherwise. The following are suitable for indoor locations. Please refer to Bodine's Specification sheet.

EBW:

Bodine's B94G (Electronic)- Temperature Rating (Ambient) 32 °F to 131° F

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F to 122° F

ARRA 2009



BUY AMERICA ACT



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.