

OPEN




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- White Alabaster Resin Diffuser w/ Solid Acrylic Top and Bottom Ends
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- CSA Listed Dry Location For Wall Mount
- ADA Compliant

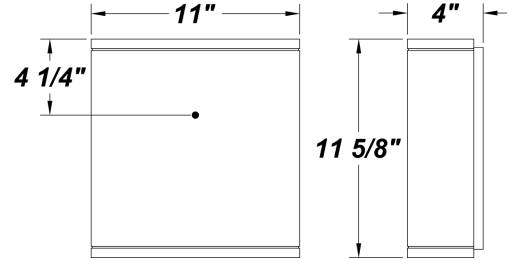

ORDERING INFORMATION

Example : (ON213E - 120E - AB - 41K)

White Alabaster is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Open	ON113E - (1) 13W 4-Pin Biax ON213E - (2) 13W 4-Pin Biax ON213Q - (2) 13W QE ON118Q - (1) 18W QE ON218Q - (2) 18W QE ON126Q - (1) 26W QE ON226Q - (2) 26W QE	120E - Electronic 277E - Electronic 347E - Electronic	AB - White Alabaster (Standard) WH - White (Please Contact Factory For White Lens Availability)	Not Applicable	41K - 4100K Color Temp. 35K - 3500K Color Temp. (Except for 113E & 213E) 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) DIM - Dimming Ballast * (QE Electronic Only) F - Fused (Not Available For 347V) TP - Tamper Resistant Screws EBW - Integral Emergency Battery* EBR - Remote Mount Battery (Field Installed)* W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS

PART NO.

White Alabaster Resin Diffuser	3003550
White Resin Diffuser (Please Contact Factory For White Lens Availability)	3003560

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:

Bodine's B94G - Temperature Rating (Ambient) 32 °F to 131° F

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT Compliant C US

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.