



**Teron Lighting**

ARCHITECTURAL INDOOR / OUTDOOR

**HERITAGE ROUND LED**




EYE

CRS

RNG

0.75" CONDUIT ENTRIES  
4 TOTAL - SPACED 90 DEGREES  
AROUND SIDE OF HOUSING

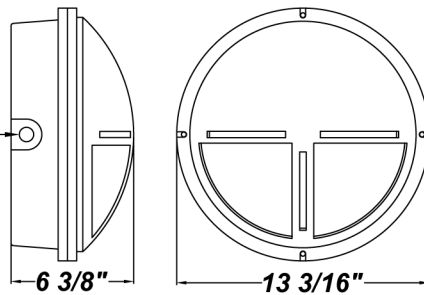

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Die-Cast, Marine Grade Aluminum Housing
- Injection Molded Polycarbonate Fascia w/ Weep Holes
- Translucent White Injection Molded, UV-Stabilizing Polycarbonate Diffuser
- 0.040" Aluminum Reflector Plate w/ Hi-Reflectance White Powder Coat Finish
- Extruded, EPDM Ribbed / Foam Rubber Gasketing
- Junction Box Pattern on Housing For Easy Mounting
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- One 40W LED Driver
- Surge Protector
- Integral Emergency Driver Available - Wall Mount Only
- CSA Listed Wet Location For Wall or Ceiling Mount

**ORDERING INFORMATION**

Example : (HRT - L33.6 - 100-277V - RNG - FRL - BZ - 51K)

HRT						
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Heritage Round	L25.0 - (72) LED Array	120V - 120V 277V - 277V (50 / 60Hz)	350mA - 350mA Constant Current Driver (For L25.0)	CRS - Cross Guard Fascia EYE - Eyelid Guard Fascia RNG - Open Guard Fascia  FRL - Frosted Ribbed Diffuser WPL - White Diffuser	BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium	27K - 2700K Color Temperature (25.0W Only)
	L25.2 - (6) 4.2W LED Strips	(For 25.0W)	(Can be Dimmed With Either Triac or Electronic Dimmers)			30K - 3000K Color Temperature 35K - 3500K Color Temperature 40K - 4000K Color Temperature 51K - 5100K Color Temperature (25.2W & 33.6W Only)
	L33.6 - (8) 4.2W LED Strips	100 - 277V (For 33.6W)	ZE12CC - 12W Line Voltage 4-Wire Dimming Driver (For L25.0) (Dimmable 0 - 10V)			PCL120 - 120V Photocell PCL277 - 277V Photocell TP - Tamper Resistant Screws F - Fused EBW - Keystone 5W Emer. Driver KT-EMER-LED-5-500-K1 (Wall Mount Only)
	4.2W LED Strips - (LM80 Standard) **40,000 Hours( L70)		12CV - 12V Constant Voltage Non-Dimming Electronic Driver (For L25.2 & L33.6)			

**REPLACEMENT PARTS**


**PART NO.**

White Ribbed Polycarbonate Diffuser	3408360
Frosted Ribbed Polycarbonate Diffuser	3408362

**NOTES**

\*\*Definition of 40,000 hours: Lifetime Rating is Based on Lamp Manufacturers' LM80 Test Results Which Utilized an Exponentially Decaying Model, a Standard Used by The Department of Energy, as Well as by Other Manufacturers.

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	40K SPECIFICATIONS	51K SPECIFICATIONS
Heritage Round LED	L33.6 - (8) 4.2W LED Strips  4.2W LED Strips - (LM80 Standard) **40,000 Hours( L70)	<b>Eight 4.2W LED Strips</b> <b>30K - 3000K Color Temp.</b>  3 Nichia NS3x183 Series LEDs Per Strip - SW30Bin, Color Temp = 3000K Nominal - Constant Voltage at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 2074 Board Lumens - 35W Input = Estimated 59 Board Lumens Per Watt	<b>Eight 4.2W LED Strips</b> <b>40K - 4000K Color Temp.</b>  3 Nichia NS3x183 Series LEDs Per Strip - SW30Bin, Color Temp = 4000K Nominal - Constant Voltage at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 2130 Board Lumens - 35W Input = Estimated 61 Board Lumens Per Watt	<b>Eight 4.2W LED Strips</b> <b>51K - 5100K Color Temp.</b>  3 Nichia NS3x183 Series LEDs Per Strip - SW51Bin, Color Temp = 5100K Nominal - Constant Voltage at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 2240 Lumens - 35W Input = Estimated 64 Board Lumens Per Watt
	L25.2 - (6) 4.2W LED Strips  4.2W LED Strips - (LM80 Standard) **40,000 Hours( L70)	<b>Six 4.2W LED Strips</b> <b>30K - 3000K Color Temp.</b>  3 Nichia NS3x183 Series LEDs Per Strip - SW30Bin, Color Temp = 3000K Nominal - Constant Voltage at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 1556 Board Lumens - 26W Input = Estimated 59 Board Lumens Per Watt	<b>Six 4.2W LED Strips</b> <b>40K - 4000K Color Temp.</b>  3 Nichia NS3x183 Series LEDs Per Strip - SW30Bin, Color Temp = 4000K Nominal - Constant Voltage at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 1598 Board Lumens - 26W Input = Estimated 61 Board Lumens Per Watt	<b>Six 4.2W LED Strips</b> <b>51K - 5100K Color Temp.</b>  3 Nichia NS3x183 Series LEDs Per Strip - SW51Bin, Color Temp = 5100K Nominal - Constant Voltage at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 1680 Lumens - 26W Input = Estimated 64 Board Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	27K SPECIFICATIONS	30K SPECIFICATIONS	35K SPECIFICATIONS	40K SPECIFICATIONS
Heritage Round LED	L25.0 - (72) LED Array - Constant Current @350mA - 25.0 Input Watts  50,000 Hours(L70)	<b>25.0W LED ARRAY</b> <b>27K - 2700K Color Temp.</b>  - 80 CRI Typ. - 2078 LED Lumens (1452 Fixture Lumens) - Estimated 58 Board Lumens Per Watt	<b>25.0W LED ARRAY</b> <b>30K - 3000K Color Temp.</b>  - 80 CRI Typ. - 2165 LED Lumens (1513 Fixture Lumens) - Estimated 61 Board Lumens Per Watt	<b>25.0W LED ARRAY</b> <b>35K - 3500K Color Temp.</b>  - 80 CRI Typ. - 2233 LED Lumens (1560 Fixture Lumens) - Estimated 62 Board Lumens Per Watt	<b>25.0W LED ARRAY</b> <b>40K - 4000K Color Temp.</b>  - 80 CRI Typ. - 2250 LED Lumens (1572 Fixture Lumens) - Estimated 63 Board Lumens Per Watt

