

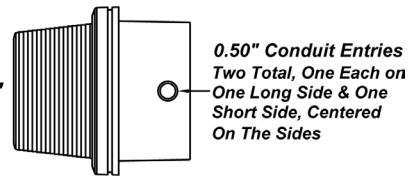


**DRIVER LED**



Textured Bronze Finish Shown

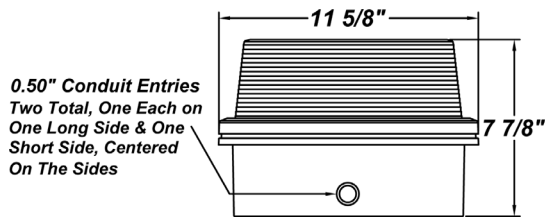

**FEATURES**

- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Prismatic Ribbed Molded Polycarbonate Lens
- Fully Gasketed
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Integral EM Battery Available (Wall Mount Only) (Voltage Must be Specified When Ordering)
- One 20W or 40W LED Driver
- Surge Protector
- CSA Listed Wet location For Surface Mount
- Awaiting IES Files, DLC, Lighting Facts, And Title 24 Labeling / Certification

**ORDERING INFORMATION**

Example : (DR - L33.6 - 100 - 277V - SM - 40K - F) Textured Black is Standard Finish

DR					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Driver	L16.8 - (4) 4.2W LED Modules - (1) 20 Watt Driver  L33.6 - (8) 4.2W LED Modules - (1) 40 Watt Driver  4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70)  Please See Page 2 For Lumen Specifications	100 - 277V	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	30K - 3000K Color Temp. 40K - 4000K Color Temp. 51K - 5100K Color Temp. F - Fused DL - Down Light ( <b>L33.6 Only</b> ) (4 Modules Directed Forward & 4 Modules Directed Downward) UDL - Up / Down Light ( <b>L33.6 Only</b> ) (4 Modules Directed Upward, & 4 Modules Directed Downward) PCL120 - Photocell 120V PCL277 - Photocell 277V EB - Bodine BSL26 - Will light 4 LED Modules - on Down Side of Fixture - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens  <b>Please Note: 120V or 277V Must Be Specified When Ordering The EB Option</b>

REPLACEMENT PARTS	PART NO.
Clear Polycarbonate Diffuser	34065

**NOTES**

**Emergency Battery Options**  
 Initial light output in Emergency mode will last for a minimum of 90 minutes. The following are suitable for indoor and damp locations.  
 Please refer to Bodine's specification sheet  
**EB:** Bodine's BSL23 - Temperature Rating (Ambient) 0°C to +50°C (32°F to 122°F)

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	40K SPECIFICATIONS	51K SPECIFICATIONS
Driver LED	L16.8 - (4) 4.2W LED Modules - (1) 20 Watt Driver	<b>L16.8 - Four 4.2W LED Modules</b> <b>30K - 3000K Color Temp.</b> -3 Nichia NS3x183 Series LEDs Per Module -SW30Bin, Color Temp = 3000K Nominal -Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 688 <b>TOTAL</b> Lumens 23W Input = Estimated 29.9 Lumens Per Watt	<b>L16.8 - Four 4.2W LED Modules</b> <b>40K - 4000K Color Temp.</b> -3 Nichia NS3x183 Series LEDs Per Module -SW30Bin, Color Temp = 3000K Nominal -Voltage Regulated at 12 Volts by Driver -80 CRI typ. (75 CRI min) 754 <b>TOTAL</b> Lumens 23W Input = Estimated 32.8 Lumens Per Watt	<b>L16.8 - Four 4.2W LED Modules</b> <b>51K - 5100K Color Temp.</b> -3 Nichia NS3x183 Series LEDs Per Module -SW51Bin, Color Temp = 5100K Nominal -Voltage Regulated at 12 Volts by Driver -80 CRI typ. (75 CRI min) 900 <b>TOTAL</b> Lumens 23W Input = Estimated 39.1 Lumens Per Watt
	L33.6 - (8) 4.2W LED Modules - (1) 40 Watt Driver  4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70)	<b>L33.6 - Eight 4.2W LED Modules</b> <b>30K - 3000K Color Temp.</b> - 3 Nichia NS3x183 Series LEDs Per Module - SW30Bin, Color Temp = 3000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) - 1880 <b>TOTAL</b> Lumens - 45.2W Input = Estimated 42 Lumens Per Watt	<b>L33.6 - Eight 4.2W LED Modules</b> <b>40K - 4000K Color Temp.</b> - 3 Nichia NS3x183 Series LEDs Per Module - SW30Bin, Color Temp = 4000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) - 1909 <b>TOTAL</b> Lumens - 45.2W Input = Estimated 42 Lumens Per Watt	<b>L33.6 - Eight 4.2W LED Modules</b> <b>51K - 5100K Color Temp.</b> - 3 Nichia NS3x183 Series LEDs Per Module - SW51Bin, Color Temp = 5100K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) - 1985 <b>TOTAL</b> Lumens - 45.2W Input = Estimated 44 Lumens Per Watt

ARRA 2009



BUY AMERICA ACT