


ECLIPSE S LED

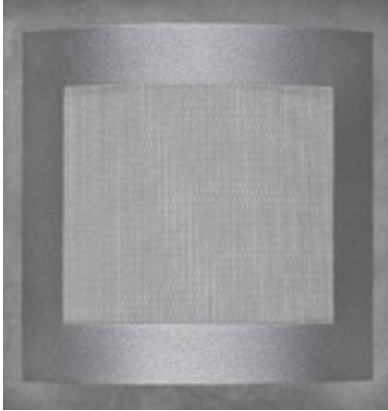


PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- 18 Gauge Steel Fascia w/ Matte Silver Powder Coat Finish
- Luminous White Acrylic w/ White Perf Covering Lens Panel
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Open Top and Bottom
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- CSA Listed Dry Location For Wall Mounting
- One 12.6W LED Driver Per 12.5W Module
- 120V Drivers Are Dimmable
- 277V Drivers Are Not Dimmable
- ADA Compliant
- Awaiting IES Files, DLC, Lighting Facts, And Title 24 Labeling / Certification

DIMMING FEATURES

- Dimmable to <5%
- Dimmable With Either Triac or Electronic Dimmers
- Over-Current, Over-Voltage, and Short Circuit Protection
- Constant Current at 350 Milliamps
- UL Class 2 Driver - Power Factor >.90
- Estimated 50,000 Hours Life (L70)

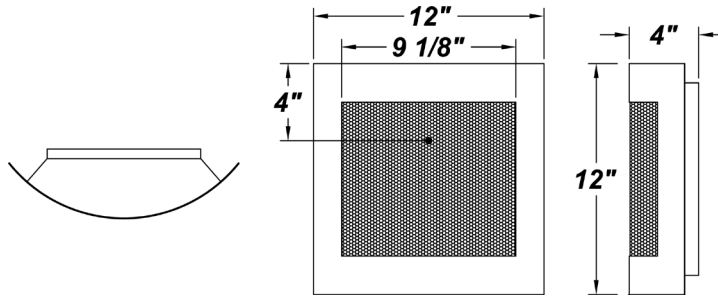

ORDERING INFORMATION

Example : (ECLS - L25.0 - 120V - PWL - SM - 40K)

Matte Silver is Standard Finish

ECLS					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Eclipse S	L12.5 - (1) 12.5W (40) LED Module L25.0 - (2) 12.5W (40) LED Modules	120V - 120V 277V - 277V (50 / 60Hz)	PWL - White Acrylic w/ White Mylar Perf (Standard) WAL - White Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	<p>One 12.5W Module Lumen Output</p> <p>30K - 3000K Color Temperature (1195 Total Module Lumens = 95.6 Lumens Per Watt)</p> <p>35K - 3500K Color Temperature (1231 Total Module Lumens = 98.5 Lumens Per Watt)</p> <p>40K - 4000K Color Temperature (1255 Total Module Lumens = 100.4 Lumens Per Watt)</p> <p>Two 12.5W Modules Lumen Output</p> <p>30K - 3000K Color Temperature (2390 Total Module Lumens = 95.6 Lumens Per Watt)</p> <p>35K - 3500K Color Temperature (2462 Total Module Lumens = 98.5 Lumens Per Watt)</p> <p>40K - 4000K Color Temperature (2510 Total Module Lumens = 100.4 Lumens Per Watt)</p> <p>F - Fused</p>

REPLACEMENT PARTS

PART NO.

White Perf Acrylic Lens	3098060
White Acrylic Lens	3097660

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT Compliant C US