



MASTERS LED

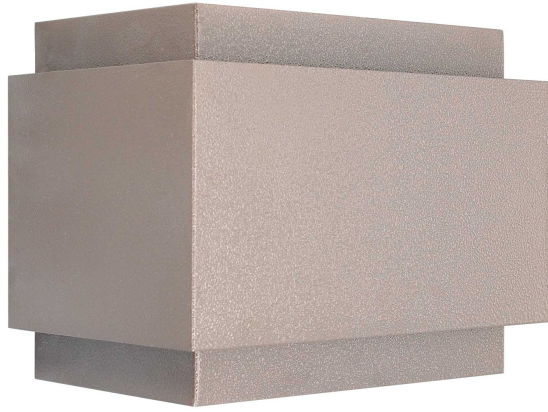

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Trim Bands w/ Textured Bronze Powder Coat Finish
- Standard Up / Down Light Output
- Internal Fixture:**
- Die-Cast Aluminum Ballast Housing w/ Textured Black Powder Coat Finish
- Clear Polycarbonate Diffuser
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- Thermal Compensation Technology Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Integral EM Battery Available (Voltage Must be Specified When Ordering)
- One 20W or 40W LED Driver
- Surge Protector
- CSA Listed Wet location For Wall Mounting
- Awaiting IES Files, DLC, Lighting Facts, And Title 24 Labeling / Certification

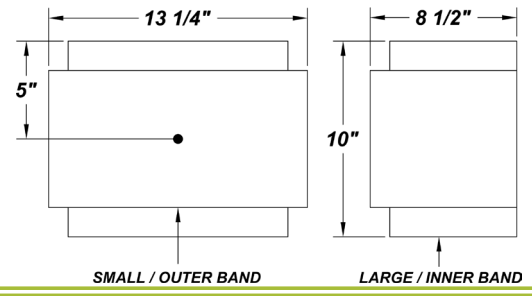

ORDERING INFORMATION

Example : (MS - L33.6 - 100 - 277V - SW - 51K - PCL277) Textured Bronze is Standard Finish

MS	PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
	Masters LED	L16.8 - (4) 4.2W LED Modules - (1) 20 Watt Driver L33.6 - (8) 4.2W LED Modules - (1) 40 Watt Driver 4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70) Please See Page 2 For Lumen Specifications	100 - 277V	Clear Polycarbonate Diffuser	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temp. 40K - 4000K Color Temp. 51K - 5100K Color Temp. F - Fused DL - Down Light (L33.6 Only) (4 Modules Directed Forward & 4 Modules Directed Downward) UDL - Up / Down Light ((L33.6 Only) (4 Modules Directed Upward, & 4 Modules Directed Downward) PCL120 - Photocell 120V PCL277 - Photocell 277V EB - Bodine BSL26 - Will light 4 LED Modules - on Down Side of Fixture - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens Please Note: 120V or 277V Must Be Specified When Ordering The EB Option

REPLACEMENT PARTS	PART NO.
Clear Polycarbonate Diffuser	34065

NOTES

Emergency Battery Options
Initial light output in Emergency mode will last for a minimum of 90 minutes. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EB: Bodine's BSL23 - Temperature Rating (Ambient) 0°C to +50°C (32°F to 122°F)

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	40K SPECIFICATIONS	51K SPECIFICATIONS
Masters LED	L16.8 - (4) 4.2W LED Modules - (1) 20 Watt Driver	L16.8 - Four 4.2W LED Modules 30K - 3000K Color Temp. -3 Nichia NS3x183 Series LEDs Per Module -SW30Bin, Color Temp = 3000K Nominal -Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) 688 TOTAL Lumens 23W Input = Estimated 29.9 Lumens Per Watt	L16.8 - Four 4.2W LED Modules 40K - 4000K Color Temp. -3 Nichia NS3x183 Series LEDs Per Module -SW30Bin, Color Temp = 3000K Nominal -Voltage Regulated at 12 Volts by Driver -80 CRI typ. (75 CRI min) 754 TOTAL Lumens 23W Input = Estimated 32.8 Lumens Per Watt	L16.8 - Four 4.2W LED Modules 51K - 5100K Color Temp. -3 Nichia NS3x183 Series LEDs Per Module -SW51Bin, Color Temp = 5100K Nominal -Voltage Regulated at 12 Volts by Driver -80 CRI typ. (75 CRI min) 900 TOTAL Lumens 23W Input = Estimated 39.1 Lumens Per Watt
	L33.6 - (8) 4.2W LED Modules - (1) 40 Watt Driver 4.2W LED Modules - (LM80 Standard) **40,000 Hours(L70)	L33.6 - Eight 4.2W LED Modules 30K - 3000K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW30Bin, Color Temp = 3000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) - 1880 TOTAL Lumens - 45.2W Input = Estimated 42 Lumens Per Watt	L33.6 - Eight 4.2W LED Modules 40K - 4000K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW30Bin, Color Temp = 4000K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) - 1909 TOTAL Lumens - 45.2W Input = Estimated 42 Lumens Per Watt	L33.6 - Eight 4.2W LED Modules 51K - 5100K Color Temp. - 3 Nichia NS3x183 Series LEDs Per Module - SW51Bin, Color Temp = 5100K Nominal - Voltage Regulated at 12 Volts by Driver - 80 CRI typ. (75 CRI min) - 1985 TOTAL Lumens - 45.2W Input = Estimated 44 Lumens Per Watt

ARRA 2009



BUY AMERICA ACT