


MASTERS LARGE LED



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Trim Bands w/ Textured Bronze Powder Coat Finish
- Standard Up / Down Light Output
- Internal Fixture:**
- Die-Cast Aluminum Ballast Housing w/ Textured Bronze Powder Coat Finish
- Fully Silicone Gasketed Channel
- Clear Prismatic UV-Stabilized Polycarbonate Ribbed Lens
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- 120V Drivers Are Dimmable
- 277V Drivers Are Not Dimmable
- CSA Listed Wet Location For Wall Mount
- Awaiting IES Files, DLC, Lighting Facts, And Title 24 Labeling / Certification

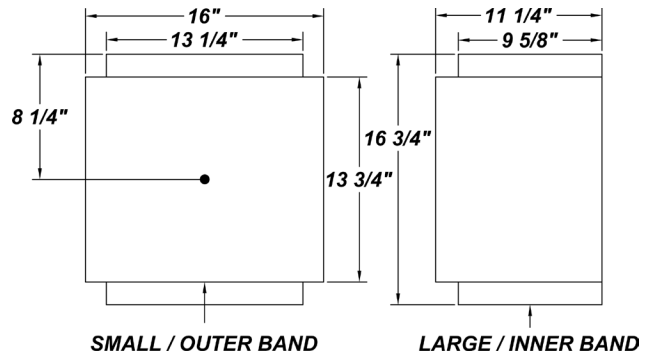

ORDERING INFORMATION

Example : (MSL - L24.0 - 277V - SM - 35K)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Masters Large	L44.0 - 44.0W (36) LED Array L40.0 - 40.0W (80) LED Array L24.0 - 24.0W (80) LED Array	120V - 120V 277V - 277V (50 / 60Hz)	Clear Polycarbonate Lens	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. F - Fused PCL - 120 or 277 Photocell TP - Tamper-Proof Screw Set EB - Bodine BSL26 - Will light 4 LED Modules - on Down Side of Fixture - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens Please Note: 120V or 277V Must Be Specified When Ordering The EB Or PCL Options See Page 2 For Wattage Specifications

REPLACEMENT PARTS

PART NO.

Clear Polycarbonate Lens

34195

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	35K SPECIFICATIONS	40K SPECIFICATIONS
Masters Large LED	L44.0 - 44.0W (36) LED Array	30K - 3000K Color Temp. (4729 Fixture Lumens) - Estimated 107.5 Fixture Lumens Per Watt	35K - 3500K Color Temp. (4871 Fixture Lumens) - Estimated 110.7 Fixture Lumens Per Watt	40K - 4000K Color Temp. (4966 Fixture Lumens) - Estimated 112.9 Fixture Lumens Per Watt
	L40.0 - 40.0W (80) LED Array	30K - 3000K Color Temp. (3748 Fixture Lumens) - Estimated 46.9 Fixture Lumens Per Watt	35K - 3500K Color Temp. (3860 Fixture Lumens) - Estimated 48.3 Fixture Lumens Per Watt	40K - 4000K Color Temp. (3935 Fixture Lumens) - Estimated 49.2 Fixture Lumens Per Watt
	L23.0 - 24.0W (80) LED Array	30K - 3000K Color Temp. (2385 Fixture Lumens) - Estimated 29.8 Fixture Lumens Per Watt	35K - 3500K Color Temp. (2457 Fixture Lumens) - Estimated 30.7 Fixture Lumens Per Watt	40K - 4000K Color Temp. (2504 Fixture Lumens) - Estimated 31.3 Fixture Lumens Per Watt

ARRA 2009



BUY AMERICA ACT Compliant