

**CORNERSTONE M LED**






PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Die-Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Clear Polycarbonate Lenses
- Aluminum Mounting Plate Mounts to Wall Surface (Centered Over And Attached to J-box)
- LED Light Source
- Surge Protector
- ADA Compliant
- CSA Listed Wet Location For Wall Mounting

J-BOX - SUPPLIED BY CUSTOMER

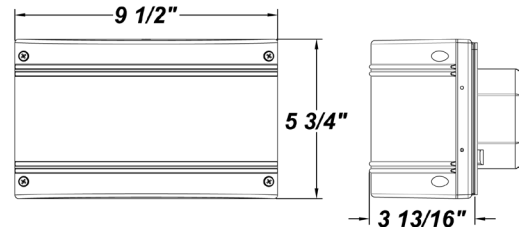

**ORDERING INFORMATION**

Example : (CRNM - L212.2 - 120-277V - 12CV - FAL - TB - 30K)

Textured Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
CRNM						
<b>Cornerstone M</b>	<b>L212.3</b> - (8) 3.06W LED Modules (4 Modules Up & 4 Modules Down)  <b>L112.3</b> - (4) 3.06W LED Modules - (One Side Illuminated)	<b>120V - 277V</b>  (50/60 HTZ)	<b>12CV</b> - 12V Constant Voltage Non-Dimming Electronic Driver	<b>CPL</b> - Clear Polycarbonate Lens (Standard) <b>FAL</b> - Frosted Acrylic Lens	<b>TB</b> - Textured Black <b>SM</b> - Matte Silver <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>KC</b> - Kenworth Chrome <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>27K</b> - 2700K Color Temp. <b>30K</b> - 3000K Color Temp. <b>35K</b> - 3500K Color Temp. <b>40K</b> - 4000K Color Temp. <b>50K</b> - 5000K Color Temp. <b>DL</b> - Downlight Only <b>UL</b> - Uplight Only

**REPLACEMENT PARTS PART NO.**

Clear Polycarbonate Lens	34105
Frosted Acrylic Lens	3056462

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT



US Compliant



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	27K SPECIFICATIONS	30K SPECIFICATIONS	35K SPECIFICATIONS
Cornerstone M	L112.3 - (4) 3.06W Strips (9 LEDs Per Strip) - (One Side Illuminated)	<b>L112.3</b> 27K - 2700K Color Temp. - 27 fV, Color Temp. = 2700K Nominal - Constant Voltage 350 mA Driver - 14.9W Input = 1212 Lumens Estimated 81.3 Lumens Per Watt	<b>L112.3</b> 30K - 3000K Color Temp. - 27 fV, Color Temp. = 3000K Nominal - Constant Voltage 350 mA Driver - 14.9W Input = 1264 Lumens Estimated 84.8 Lumens Per Watt	<b>L112.3</b> 35K - 3500K Color Temp. - 27 fV, Color Temp. = 3500K Nominal - Constant Voltage 350 mA Driver - 14.9W Input = 1300 Lumens Estimated 87.2 Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	40K SPECIFICATIONS	50K SPECIFICATIONS
Cornerstone M	L112.3 - (4) 3.06W Strips (9 LEDs Per Strip) - (One Side Illuminated)	<b>L112.3</b> 40K - 4000K Color Temp. - 27 fV, Color Temp. = 4000K Nominal - Constant Voltage 350 mA Driver - 14.9W Input = 1320 Lumens Estimated 88.6 Lumens Per Watt	<b>L112.3</b> 50K - 5000K Color Temp. - 27 fV, Color Temp. = 3000K Nominal - Constant Voltage 350 mA Driver - 14.9W Input = 1440 Lumens Estimated 96.6 Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	27K SPECIFICATIONS	30K SPECIFICATIONS	35K SPECIFICATIONS
Cornerstone M	L212.3 - (8) 3.06W Strips (9 LEDs Per Strip)	<b>L212.3</b> 27K - 2700K Color Temp. - 27 fV, Color Temp. = 2700K Nominal - Constant Voltage 350 mA Driver - 29.8W Input = 2424 Lumens Estimated 81.3 Lumens Per Watt	<b>L212.3</b> 30K - 3000K Color Temp. - 27 fV, Color Temp. = 3000K Nominal - Constant Voltage 350 mA Driver - 29.8W Input = 2528 Lumens Estimated 84.8 Lumens Per Watt	<b>L212.3</b> 35K - 3500K Color Temp. - 27 fV, Color Temp. = 3500K Nominal - Constant Voltage 350 mA Driver - 29.8W Input = 2600 Lumens Estimated 87.2 Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	40K SPECIFICATIONS	50K SPECIFICATIONS
Cornerstone M	L212.3 - (8) 3.06W Strips (9 LEDs Per Strip)	<b>L212.3</b> 40K - 4000K Color Temp. - 27 fV, Color Temp. = 4000K Nominal - Constant Voltage 350 mA Driver - 29.8W Input = 2640 Lumens Estimated 88.6 Lumens Per Watt	<b>L212.3</b> 50K - 5000K Color Temp. - 27 fV, Color Temp. = 3000K Nominal - Constant Voltage 350 mA Driver - 29.8W Input = 2880 Lumens Estimated 96.6 Lumens Per Watt

ARRA 2009



BUY AMERICA ACT C US Compliant