

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

GUARDIAN M LED



Standard Fixture





CNC Fascia



DMC Fascia

FEATURES

- Extruded Aluminum Housing w/ Matte Silver Polyester Powder Coat Finish
- Die Cast Aluminum End Caps w/ Matte Silver Polyester Powder Coat Finish
- High Impact White Acrylic Diffuser (50% DR Acrylic)
- Aluminum LED Mounting Plate
- Recessed Stainless Steel Screws
- Fixture Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- 120V - 277V,
- CSA Listed Wet Location For Wall Mount Only
- ADA Compliant

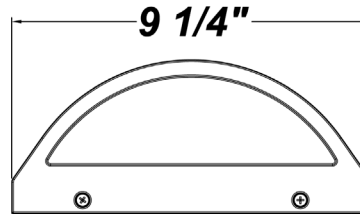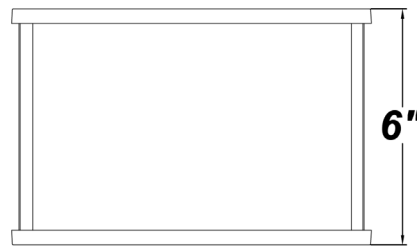

ORDERING INFORMATION

Example : (GRDM - DMC - L12.3 - 120-277V - 350mA - WAL - TB - 40K) Matte Silver is Standard Finish

PRODUCT	OPTIONAL FASCIA	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Guardian M (GRDM)	CNC - Concorde DMC - DiMarco	L12.3 - (1) 12.3W LED Module	120 - 277V	350mA - 350mA Constant Current Driver (For L12.3) (Dimmable @ 277V With Either Triac or Electronic Dimmers) TE350 - 350mA ELV Low Voltage 2-Wire Electronic Driver (For L12.3) (Dimmable @ 120V Only)	WAL - White Acrylic Lens	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	27K - 2700K Color Temp. 30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. 50K - 5000K Color Temp. SP - Surge Protector OEL - Single End Window TEL - Twin End Windows (Both Ends)

REPLACEMENT PARTS PART NO.

White Acrylic LED Lens	3036460
------------------------	---------

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

