


CADDY LG LED



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Tempered Clear Glass Diffuser
- 8W LED Module
- 50W LED Driver
- Surge Protector
- Fully Gasketed
- Mounts Direct to Flat Surface w/Three #8 Wall Anchors (Not Included)
- CSA Listed Wet Location For Wall Mount (Down Light Only)
- L70 Life Time For 50,000hr

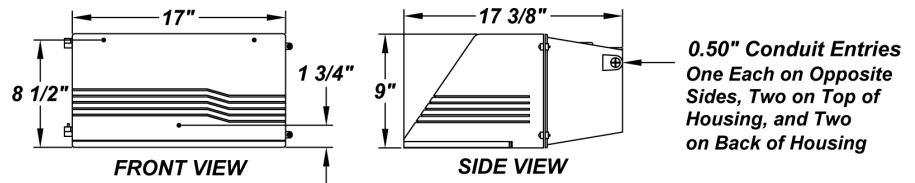

ORDERING INFORMATION

Example : (CDL - L48.0 - 120 - 277V - CGL - SW - 50K)

Textured Bronze is Standard Finish

CDL	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Caddy LG	L48.0 - 48W LED Module	120 - 277V Please See "Options" Column For Driver Specifications	CGL - Clear Glass Lens (Standard)	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temperature 40K - 4000K Color Temperature 50K - 5000K Color Temperature MS - Motion Sensor (Can be Used w/ "SDIM" Option) PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimmable Driver (0 - 10V) SDIM - Step-Dimmable Driver (Dimmable to 25% & 50%) PDIM - Pulse Width Dimmable Driver (0 - 10V) F - Fused EBW - Bodine BSL23 - Will light Two 5.5W LED Strips - Average 340 Source Lumens EBC - Bodine BSL10 - Will light Two 5.5W LED Strips - Estimated 1236 Source Lumens Please Note: 120V or 277V Must Be Specified When Ordering The EB Option

REPLACEMENT PARTS

PART NO.

Clear Glass Diffuser

37050

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	40K SPECIFICATIONS	50K SPECIFICATIONS
Caddy LG LED	L48.0 - (1) 48W LED Board	LED Specifications		
		- 90 LEDs Per Strip	- 90 LEDs Per Strip	- 90 LEDs Per Strip
		- SW50Bin, Color Temp = 4000K Nominal	- SW50Bin, Color Temp = 4000K Nominal	- SW50Bin, Color Temp = 5000K Nominal
		- Constant Current at 1050mA by Driver	- Constant Current at 1050mA by Driver	- Constant Current at 1050mA by Driver
- 80 CRI typ. (75 CRI min) 4971 Lumens	- 80 CRI typ. (75 CRI min) 5368 Lumens	- 80 CRI typ. (75 CRI min) 5650 Lumens	- 80 CRI typ. (75 CRI min) 5650 Lumens	
- 58W Input = Estimated 86 Lumens Per Watt	- 58W Input = Estimated 93 Lumens Per Watt	- 58W Input = Estimated 97 Lumens Per Watt	- 58W Input = Estimated 97 Lumens Per Watt	

