

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


AZINGER



LINEAR FLUORESCENT

FEATURES

- Steel Trim w/ Swedish Steel Powder Coat Finish
- Steel Housing w/ White Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Lamps Not Included
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Integral EM Battery Available (3' & 4' Fixtures Only)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

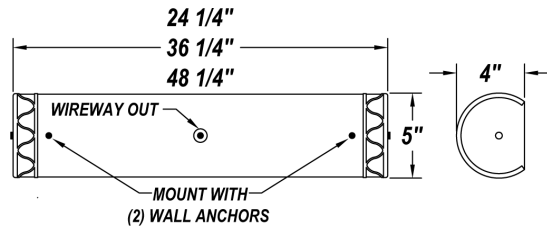

ORDERING INFORMATION

Example : (AR24217E - 120E) Swedish Steel is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
AR24 (24" Fixture)	AR24117E - (1) 17W T8	120E - 120V Electronic	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper KC - Kenworth Chrome SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	F - Fused (Not Available For 347V) EB - Integral Emergency Battery (3' and 4' Only)** (3' Available in T8 Only) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (T8 Lamping Only) DIM - Dimming Ballast (T8 Lamping Only) MSP - Program Start Ballast (Recommended for Motion Sensor) ***
	AR24217E - (2) 17W T8	277E - 277V Electronic			
	AR24214E - (2) 14W T5	347E - 347V Electronic			
	AR24224E-HO* - (2) 24W T5				
AR36 (36" Fixture)	AR36125E - (1) 25W T8	120E - 120V Electronic			
	AR36225E - (2) 25W T8	277E - 277V Electronic			
	AR36221E - (2) 21W T5	347E - 347V Electronic			
	AR36239E-HO* - (2) 39W T5				
AR48 (48" Fixture)	AR48132E - (1) 32W T8	120E - 120V Electronic			
	AR48232E - (2) 32W T8	277E - 277V Electronic			
	AR48228E - (2) 28W T5	347E - 347V Electronic			
	AR48254E-HO* - (2) 54W T5				
	HO* - HIGH OUTPUT				

REPLACEMENT PARTS PART NO.

24" White Acrylic Diffuser	3018160
36" White Acrylic Diffuser	3018560
48" White Acrylic Diffuser	3012960

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

****Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW:
Bodine's B50 (T8 Electronic) - Temperature Rating (Ambient) 32° F - 131° F
Bodine's B550LP (T5 Electronic) - Temperature Rating (Ambient) 32° F - 122° F

EBR:
Bodine's B30 (T8 Electronic) - Temperature Rating (Ambient) 41° F - 122° F



*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.