

HAZELTINE SMALL




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Aluminum Mounting Pan & Trim w/ Hi-Reflectance Powder Coat Finish
- Sand-Blasted White Polycarbonate Diffuser
- Luminous White Polycarbonate Top Diffuser For "Halo" Effect
- Twist & Lock System - No Exposed Hardware
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- CSA Listed Damp Location For Wall or Ceiling Mount

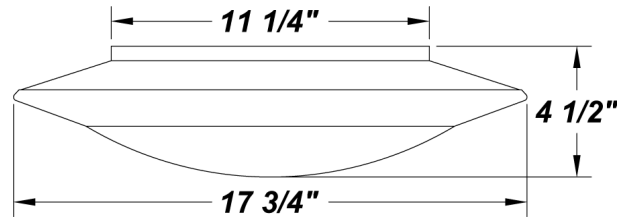

ORDERING INFORMATION

Example : (HES213Q - 120E - WH - 41K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Hazeltine Small	HES113Q - (1) 13W QE HES213Q - (2) 13W QE HES313Q - (3) 13W QE HES118Q - (1) 18W QE HES218Q - (2) 18W QE HES122C - (1) 22W T5 Circ HES126Q - (1) 26W QE HES226Q - (2) 26W QE	120E - Electronic 277E - Electronic 347E - Electronic	Not Applicable	WH - White (Standard) SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. (Standard For T5) 27K - 2700K Color Temp. (Standard) (Not Available For T5 Circ) F - Fused (Not Available For 347V) DIM - Dimming Ballast (QE Electronic Only) (1 And 2-Lamp Fixtures Only) EBR - Remote Mount Battery (Field Installed)* MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS **PART NO.**

White Polycarbonate Diffuser	3019360
White Polycarbonate Top (Halo) Diffuser	3023560

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBR:

Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT



VANDAL RESISTANT



CSA US

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.