

PROJECT :
TYPE :
ORDERING # :
COMMENTS :


LITTLER



COMPACT FLUORESCENT

FEATURES

- Die-Cast Acrylic Housing w/ Black Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamp Included
- ETL Listed Wet Location
- ADA Compliant

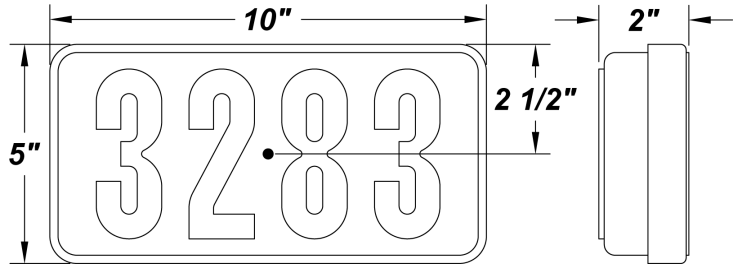

ORDERING INFORMATION

Example : (LR113 - 120N - 41K) Black is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Littler	LR113 - (1) 13W PL 2-Pin Biax Magnetic (120V Only)	120N - 120V NPF Magnetic NOTE: 277V Magnetic is NOT Available	Not Applicable	Not Applicable Note: Custom Colors Are Not Available	41K - 4100K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. (Standard) F - Fused PCL - Photocell EBR - Remote Mount Battery (Field Installed)** 4DA - 4 Digits Attached 3DA - 3 Digits Attached 2DA - 2 Digits Attached 1DA - 1 Digits Attached (Please Specify Digits / Numbers When Ordering)

REPLACEMENT PARTS PART NO.

White Acrylic Diffuser	3047160
------------------------	---------

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

**** Emergency Battery Options**
Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBR:
Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F

ARRA 2009



BUY AMERICA ACT Compliant