

# INSTALLATION & MAINTENANCE INSTRUCTIONS

## FOR THE TALON W

Outdoor Wall Mounted Luminaire



Echelon  
COLLECTION

TERON  
SERIES

### INSTALLATION



Figure 1


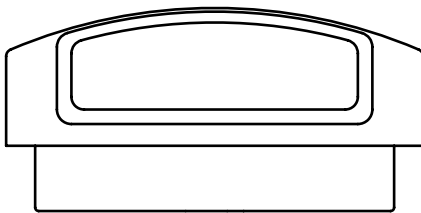


Figure 2



Universal Mounting Ring

**NOTE: THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

1] The Talon Series is designed to be mounted directly to 3" or 4" octagon J-box (by others) with #8 wall anchors.

2] Locate supplied Bagged Mounting Hardware, thread provided Screws and Hex Nuts to Universal Mounting Ring (Item 1) as shown, and secure to J-box. (J-box supplied by others)

3] **NOTE: TURN OFF CIRCUIT THAT FIXTURE IS BEING WIRED TO AT CIRCUIT BREAKER PRIOR TO CONNECTING FIXTURE LEADS.**

4] Connect the fixture leads to the supply leads. Teron stipulates Black - Line; White - Common; Green/Bare - Ground.

5] Secure Back Plate (Figure 1) to Universal Mounting Ring with Thumb Nuts.

6] Check the re-lamp label to ensure that the lamp is the specified wattage. Fluorescent lamps will not snap into incorrect lampholders.

7] Outdoor wall fixtures must be caulked with a suitable waterproof sealant across the top, and at least 2" down each side of the fixture to properly seal it to the mounting surface. A small space should be open at the bottom for excess moisture runoff.

8] Restore power to circuit.

### MAINTENANCE

The lens should be cleaned once every 6 months. The lens panels must be washed in a mild soap solution. **DO NOT** use cleansers containing bleach.

The metal portion of the fixture can be wiped clean as needed using a mild soap solution.

**ATTENTION:** Avoid moving any exposed wires. If any wires are accidentally disconnected, call a professional to repair.

These instructions are general to the fixture noted.  
Due to the numerous options, all variations may  
not be covered.

Installation of an electrical luminaire must be  
performed by a qualified professional. The  
fixture must be wired in accordance to all  
local & national electrical codes.