

CADDY SM




COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Die-Cast Aluminum Housing w/ Textured Bronze Polyester Powder Coat Finish
- Clear Tempered Glass Lens
- Aluminum Hammertone Reflectors
- Fully Gasketed
- Mounts Direct to Flat Surface w/Three #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available
- CSA Listed For Wall Mounting

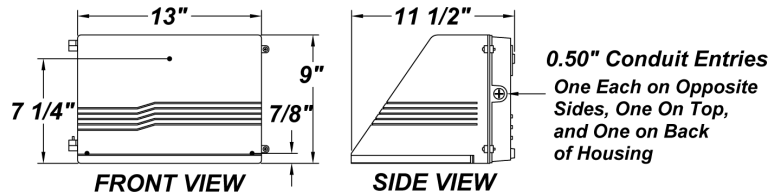

ORDERING INFORMATION

Example : (CDS142X - 120E - 35K)

Textured Bronze is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Caddy SM	CDS50MH - 50W MH CDS70MH - 70W MH CDS100MH - 100W MH CDS50 - 50W HPS CDS70 - 70W HPS CDS100 - (1) 100W HPS CDS132X - (1) 32W TBX CDS142X - (1) 42W TBX CDS218X - (2) 18W TBX CDS226X - (2) 26W TBX CDS232X - (2) 32W TBX	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - MT HPF (Wired 347V) <u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - Electronic 120V 277E - Electronic 277V	Not Applicable	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) PCL - Photocell F - Fused QRS - Quartz Restrike (DC/Bay - Lamp Included) QZS - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (2x32W Maximum) EBR - Remote Mount Battery (Field Installed) ** W2L - Wire 2 Lamps to Integral Emergency Battery (EBW Only) (2x18W Maximum) MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS

PART NO.

Replacement Clear Tempered Glass Lens

37049

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

NOTES

***Fluorescent Only**

****Emergency Battery Options (2x32W Maximum)**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F

EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F

EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

ARRA 2009



BUY AMERICA ACT

