

**CONCORDE W**





COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Housing:**
- 18 Gauge Steel (Perforated) w/ Matte Silver Polyester Powder Coat Finish
  - Matte White Acrylic Diffuser
- Internal Fixture:**
- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
  - Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
  - Clear Polycarbonate Diffuser For Fluorescent Wattages
  - Clear Borosilicate Diffuser For HID Wattages
  - Mounts Directly to 4" Junction Box (By Others)
  - Mounting Hardware Included
  - Lamps Included
  - Integral EM Battery Available
  - ETL Listed Wet Location

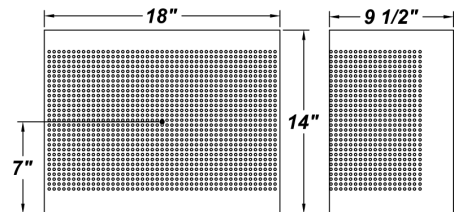

**ORDERING INFORMATION**

Example : (CNCW - M70 - MTH - SM) Matte Silver is Standard Finish

CNCW					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
<b>Concorde W</b>	<b>M50 - 50W MH</b> <b>M70 - 70W MH</b> <b>M100 - 100W MH</b>  <b>S50 - 50W HPS</b> <b>S70 - 70W HPS</b> <b>S100 - 100W HPS</b>  <b>F218Q - (2) 18W QE</b> <b>F226Q - (2) 26W QE</b> <b>F132X - (1) 32W TBX</b> <b>F142X - (1) 42W TBX</b> <b>F157X - (1) 57W TBX</b>	<u><b>METAL HALIDE (MH)</b></u> <b>120V - 120V HPF</b> <b>120H - MT HPF (Wired 120V)</b> <b>MTH - MT HPF (Wired 277V)</b>  <u><b>HPS</b></u> <b>120V - 120V HPF</b> <b>120H - MT HPF (Wired 120V)</b> <b>MTH - MT HPF (Wired 277V)</b>  (MT - Multi-Tap)  <u><b>FLUORESCENT (F)</b></u> <b>120E - Electronic 120V</b> <b>277E - Electronic 277V</b>	<b>WAL - White Acrylic</b>	<b>SM - Matte Silver</b> <b>TB - Textured Black</b> <b>AC - Antique Copper</b> <b>AS - Antique Silver</b> <b>BT - Bronze Mist</b> <b>CP - Copper</b> <b>SN - Sand</b> <b>SW - Swedish Steel</b> <b>BZ - Textured Bronze</b> <b>TW - Textured White</b>  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>41K - 4100K Color Temp.*</b> (Standard on Fluorescent) <b>35K - 3500K Color Temp.*</b> <b>30K - 3000K Color Temp.*</b> <b>27K - 2700K Color Temp.*</b> F - Fused <b>QRS - Quartz Restrike (DC/Bay)</b> <b>QZS - Quartz Socket Only</b> <b>PCL120 - Photocell 120V</b> <b>PCL277 - Photocell 277V</b> <b>EBW / EBC - Integral Emergency Battery**</b> (1x42W Maximum) <b>EBR - Remote Mount Battery (Field Installed)*</b> <b>W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max)</b> <b>MSP - Program Start Ballast</b> (Recommended for Motion Sensor) ***

**REPLACEMENT PARTS**

	PART NO.
White Acrylic Lens	3024260
Housing (Specify Housing Color)	6035699
Internal Polycarbonate Lens	34065
Internal Glass Lens (MH & HPS)	37045

**NOTES**

**\*Fluorescent Only**  
**\*\*Emergency Battery Options**  
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet  
**EBW: Bodine's B94G (Electronic)** - Temperature Rating (Ambient) 32° F - 131° F  
**EBC: Bodine's B4CF1 (Electronic)** - Temperature Rating (Ambient) -4° F - 131° F  
**EBR: Bodine's B94CG (Electronic)** - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

\*\*\* For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

