

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

GALAXY W



COMPACT FLUORESCENT & HID


FEATURES

Housing:

- 18 Gauge Steel w/ Textured Black Polyester Powder Coat Finish
- Matte White Acrylic Diffuser w/ Aluminum Perf Front Shield

Internal Fixture:

- Cast Aluminum Housing w/ Textured Black Polyester Powder Coat Finish
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Clear Polycarbonate Diffuser For Fluorescent Wattages
- Clear Borosilicate Diffuser For HID Wattages
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Lamps Included
- Integral EM Battery Available
- ETL Listed Wet Location

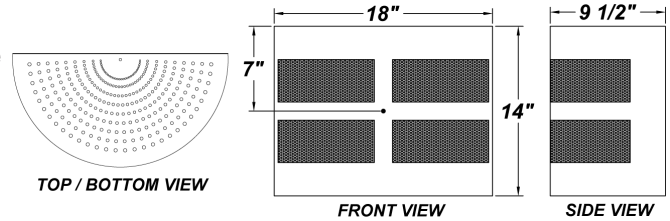

ORDERING INFORMATION

Example : (GLXW - M50 - 120H - TB)

Textured Black is Standard Finish

GLXW					
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Galaxy W	M50 - 50W MH M70 - 70W MH M100 - 100W MH S50 - 50W HPS S70 - 70W HPS S100 - 100W HPS F218Q - (2) 18W QE F226Q - (2) 26W QE F132X - (1) 32W TBX F142X - (1) 42W TBX F157X - (1) 57W TBX	<u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) <u>HPS</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - Electronic 120V 277E - Electronic 277V	WAL - White Acrylic	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory	41K - 4100K Color Temp.* (Standard on Fluorescent) 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* F - Fused QRS - Quartz Restrike (DC/Bay) QZS - Quartz Socket Only PCL120 - Photocell 120V PCL277 - Photocell 277V EBW / EBC - Integral Emergency Battery** (1x42W Maximum) W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) MSP - Program Start Ballast (Recommended for Motion Sensor) ***

REPLACEMENT PARTS

PART NO.

White Acrylic Lens	3024260
Perforated Shield	53040
Housing (Specify Housing Color)	6035399
Internal Polycarbonate Lens	34065
Internal Glass Lens (MH & HPS)	37045

NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet
EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F
EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.

