


MASTERS

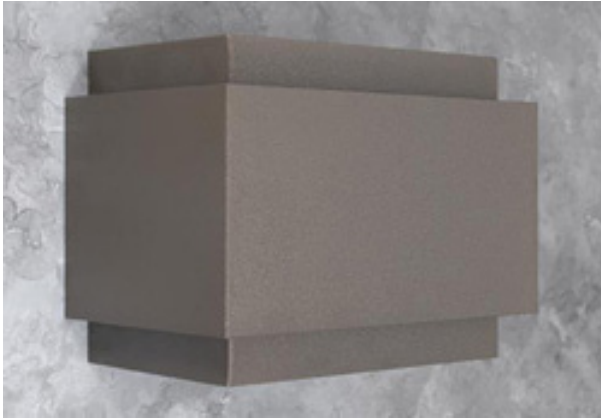


COMPACT FLUORESCENT & HID

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Steel Trim Bands w/ Textured Bronze Powder Coat Finish
- Standard Up / Down Light Output
- **Internal Fixture:**
- Die-Cast Aluminum Ballast Housing w/ Textured Black Powder Coat Finish
- Clear Polycarbonate Diffuser For Fluorescent Wattages
- Clear Borosilicate Glass Diffuser For HID Wattages
- Mounts Direct to Flat Surface w /Four #8 Wall Anchors (Not Included)
- Lamps Included
- Integral EM Battery Available
- ETL Listed Wet Location
- MH Wattages Are CSA Listed For Wall Mounting up to 100W, Including PCL and 50W Quartz Lamp (QRS)
- Electronic Wattages Are CSA Listed For Wall Mounting up to 2x26W, Including EB & SH / SHH Options

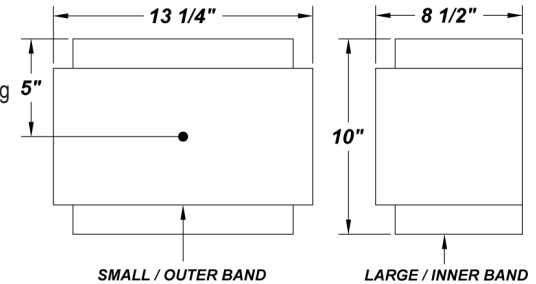

ORDERING INFORMATION

Example : (MS50MH - 120H - TB)

Textured Bronze is Standard Finish

| PRODUCT | SOURCE/WATTAGE | VOLTAGE | DIFFUSER | FINISH | OPTIONS |
|---------|---|--|----------------|---|---|
| Masters | MS50MH - 50W MH MS70MH - 70W MH MS100MH - 100W MH MS50 - 50W HPS MS70 - 70W HPS MS100 - 100W HPS MS118Q - (1) 18W QE MS218Q - (2) 18W QE MS126Q - (1) 26W QE MS226Q - (2) 26W QE MS132X - (1) 32W TBX MS142X - (1) 42W TBX MS157X - (1) 57W TBX | <u>METAL HALIDE (MH)</u> 120V - 120V HPF 120H - MT HPF (Wired 120V) MTH - MT HPF (Wired 277V) 347H - 347V HPF <u>HPS</u> 120V - 120V HPF 120H - MT HPF(Wired 120V) MTH - MT HPF (Wired 277V) (MT - Multi-Tap) <u>FLUORESCENT (F)</u> 120E - 120V Electronic 277E - 277V Electronic 347E - 347V Electronic | Not Applicable | SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White RAL Colors or Custom Match - Consult Factory | 41K - 4100K Color Temp.* 35K - 3500K Color Temp.* 30K - 3000K Color Temp.* 27K - 2700K Color Temp.* (Standard) F - Fused PCL120 - Photocell 120V PCL277 - Photocell 277V DIM - Dimming Ballast* (Electronic Only) QRS - Quartz Restrike (DC/Bay - Lamp Included) QRZ - Quartz Socket Only EBW / EBC - Integral Emergency Battery** (Electronic Only) EBR - Remote Mount Battery (Field Installed)** SH - Full Shield (For Dark Sky Applications) SHH - Half Shield (For Dark Sky Applications) W2L - Wire 2 Lamps to Integral Emergency Battery (2x18W Max) MSP - Program Start Ballast (Recommended for Motion Sensor)*** |

REPLACEMENT PARTS

PART NO.

| | |
|-----------------------------------|-------|
| Clear Polycarbonate Diffuser | 34065 |
| Clear Borosilicate Glass Diffuser | 37045 |

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



NOTES

***Fluorescent Only**

****Emergency Battery Options**

Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet

- EBW: Bodine's B94G (Electronic) - Temperature Rating (Ambient) 32° F - 131° F
- EBC: Bodine's B4CF1 (Electronic) - Temperature Rating (Ambient) -4° F - 131° F
- EBR: Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F

*** For Electronic Wattage Fixtures Being Used in Conjunction With an Occupancy Sensor (Either Provided by us, or Your Own System), a Program Start Ballast is Recommended in Order to Maximize Lamp Life.