

**NIBLICK**




COMPACT FLUORESCENT

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Brushed Chrome Housing
- Clear Ribbed Polycarbonate Jar Diffuser
- Lamps Included
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- CSA Listed Wet Location For Wall Mount

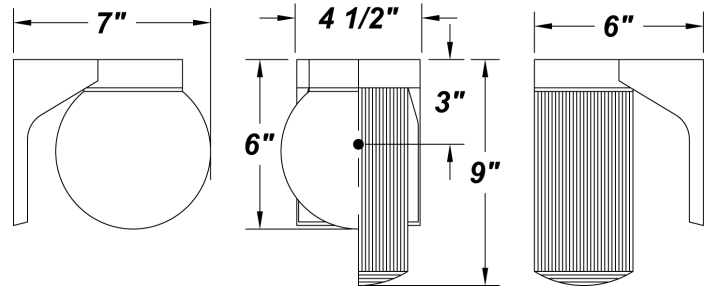

**ORDERING INFORMATION**

Example : (NK113 - 120N - 41K)

Chrome is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
<b>Niblick</b>	<b>NK113Q</b> - (1) 13W Q 2-Pin Biax Magnetic Only (Globe Required) <b>NK113</b> - (1) 13W 2-Pin Biax Magnetic Only <b>NK118Q</b> - (1) 18W QE <b>NK126Q</b> - (1) 26W QE	<b>120N</b> - 120V NPF Magnetic <b>120E</b> - 120V Electronic  <b>NOTE: 277V Magnetic or Electronic NOT Available</b>	<b>JC</b> - Clear Jar Polycarbonate Lens (Standard) <b>JW</b> - White Jar Polycarbonate Lens <b>GC</b> - Clear 6" Ribbed Polycarbonate Globe <b>GW</b> - White 6" Polycarbonate Globe	<b>CH</b> - Chrome (Standard) <b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>CP</b> - Copper <b>KC</b> - Kenworth Chrome <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>41K</b> - 4100K Color Temp. <b>35K</b> - 3500K Color Temp. <b>30K</b> - 3000K Color Temp. <b>27K</b> - 2700K Color Temp. (Standard) <b>F</b> - Fused <b>PCL120</b> - Photocell 120V <b>EBR</b> - Remote Mount Battery (Field Installed)**

**REPLACEMENT PARTS**

**PART NO.**

Clear Ribbed Jar Polycarbonate Diffuser	34024
White Ribbed Jar Polycarbonate Diffuser	3402460
Clear 6" Ribbed Polycarbonate Globe Diffuser	34030
White 6" Polycarbonate Globe Diffuser	3402960

**NOTES**

**\*Fluorescent Only**  
**\*\*Emergency Battery Options**  
 Initial light output in Emergency mode will last for a minimum of 90 minutes. 1 lamp wired unless ordered otherwise. The following are suitable for indoor and damp locations. Please refer to Bodine's specification sheet  
**EBR:** Bodine's B94CG (Electronic) - Temperature Rating (Ambient) 32° F - 122° F  
 Bodine's B413 (Magnetic) - Temperature Rating (Ambient) 32° F - 122° F

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

ARRA 2009



BUY AMERICA ACT C US