



Teron Lighting

ARCHITECTURAL INDOOR / OUTDOOR

HERITAGE ROUND LED




EYE

CRS

RNG

0.75" CONDUIT ENTRIES
4 TOTAL - SPACED 90 DEGREES
AROUND SIDE OF HOUSING

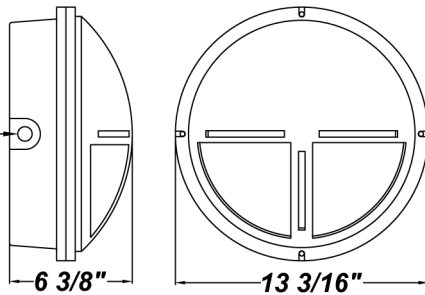

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Die-Cast, Marine Grade Aluminum Housing
- Injection Molded Polycarbonate Fascia w/ Weep Holes
- Translucent White Injection Molded, UV-Stabilizing Polycarbonate Diffuser
- 0.040" Aluminum Reflector Plate w/ Hi-Reflectance White Powder Coat Finish
- Extruded, EPDM Ribbed / Foam Rubber Gasketing
- Junction Box Pattern on Housing For Easy Mounting
- Thermal Compensation Technology For the L24.5 Ensures Longer LED Lifetime, Which is Ideal For Fixtures Being Placed in Area With Fluctuating or Higher Ambient Temperatures
- 100V - 277V
- Surge Protector
- Integral Emergency Driver Available - Wall Mount Only
- CSA Listed Wet Location For Wall or Ceiling Mount

ORDERING INFORMATION

Example : (HRT - L21.0 - 100-277V - ZE700 - RNG - FRL - TI - 40K)

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Heritage Round	L21.0 - (60) LED Array L24.5 - (8) 3.066W LED Strips	100 - 277V	ZE700- Line Voltage 4-Wire Dimming Driver (For L21.0 Only) (Dimmable 0 - 10V) 12CV - 12V Constant Voltage Non-Dimming Electronic Driver (For L24.5 Only)	CRS - Cross Guard Fascia EYE - Eyelid Guard Fascia RNG - Open Guard Fascia FRL - Frosted Ribbed Diffuser WPL - White Diffuser	BK - Matte Black BZ - Matte Bronze WH - Matte White TI - Matte Titanium	27K - 2700K Color Temperature 30K - 3000K Color Temperature 35K - 3500K Color Temperature 40K - 4000K Color Temperature 50K - 5000K Color Temperature (Not Available For L21.0) PCL120 - 120V Photocell PCL277 - 277V Photocell TP - Tamper Resistant Screws F - Fused EB51 - 5.1W Emergency Driver (Wall Mount Only)

REPLACEMENT PARTS	PART NO.
White Ribbed Polycarbonate Diffuser	3408360
Frosted Ribbed Polycarbonate Diffuser	3408362

NOTES

**Definition of 40,000 hours: Lifetime Rating is Based on Lamp Manufacturers' LM80 Test Results Which Utilized an Exponentially Decaying Model, a Standard Used by The Department of Energy, as Well as by Other Manufacturers.

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

SOURCE/WATTAGE	30K SPECIFICATIONS
L21.0 - (60) LED Array - Constant Current 700 Milliamps Driver - 21.0 Input Watts	L21.0 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 80 CRI Typ. - 2640 LED Source Lumens - 125.7 LED Source Lumens Per Watt
L24.5 - (8) 3.066W ThermAdjust LED Strips - Voltage Regulated at 12 Volts by Driver - 24.5W Input Watts (LM80 Standard) 40,000 Hours(L70)	L24.5 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 2528 LED Source Lumens - 103.2 LED Source Lumens Per Watt

