

**HAZELTINE SMALL LED**




PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Aluminum Mounting Pan & Trim w/ Hi-Reflectance Powder Coat Finish
- Sand-Blasted White Polycarbonate Diffuser
- Luminous White Polycarbonate Top Diffuser For "Halo" Effect
- Twist & Lock System - No Exposed Hardware
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- Damp Location
- 120V Drivers Are Dimmable
- 277V Drivers Are Not Dimmable

**DIMMING FEATURES**

- Dimmable to <5%
- Dimmable With Either Triac or Electronic Dimmers
- Over-Current, Over-Voltage, and Short Circuit Protection
- Constant Current at 350 Milliamps
- UL Class 2 Driver - Power Factor >.90
- Estimated 50,000 Hours Life (L70)

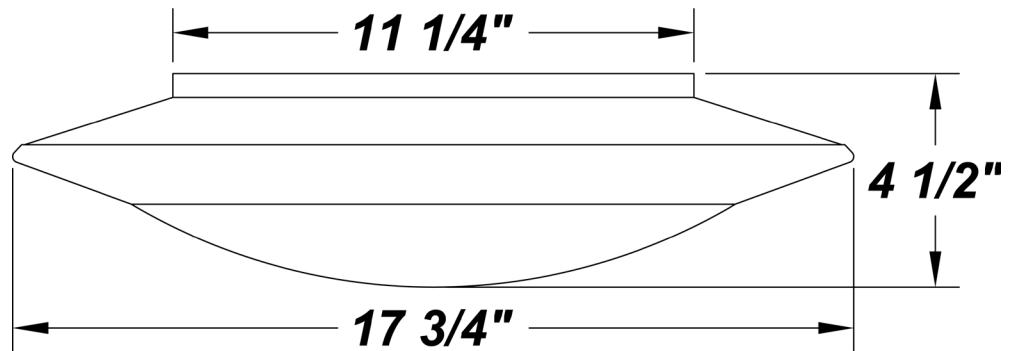

**ORDERING INFORMATION**

Example : (HES - L12.5 - 120V - 30K)

White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
HES					
<b>Hazeltine Small</b>	<b>L12.5 - (36) LED Array</b>	<b>120V - 120V</b> <b>277V - 277V</b>	<b>Not Applicable</b>	<b>WH - White (Standard)</b> <b>SM - Matte Silver</b> <b>TB - Textured Black</b> <b>AC - Antique Copper</b> <b>AS - Antique Silver</b> <b>BT - Bronze Mist</b> <b>CP - Copper</b> <b>SN - Sand</b> <b>SW - Swedish Steel</b> <b>BZ - Textured Bronze</b> <b>TW - Textured White</b>	<b>30K - 12.5W Has 808 Fixture Lumens</b> <b>35K - 12.5W Has 833 Fixture Lumens</b> <b>40K - 12.5W Has 840 Fixture Lumens</b>
	<b>L25.0 - (72) LED Array</b>	(50 / 60Hz)		<b>RAL Colors or Custom Match - Consult Factory</b>	<b>30K - 25.0W Has 1513 Fixture Lumens</b> <b>35K - 25.0W Has 1560 Fixture Lumens</b> <b>40K - 25.0W Has 1572 Fixture Lumens</b>  <b>F - Fused</b>  <b>See Page 2 For Wattage Specifications</b>

**REPLACEMENT PARTS**

**PART NO.**

White Polycarbonate Diffuser	3019360
White Polycarbonate Top (Halo) Diffuser	3023560

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**Please Note:** All Lumen Information is For Estimation / Specification Purposes Only.  
Once Proper Certifications Are Received, The Data Will be Updated Accordingly.

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS	35K SPECIFICATIONS	40K SPECIFICATIONS
HazelTine Small LED	<b>L12.5</b> - (36) LED Array - Constant Current @350mA - 12.5 Input Watts  50,000 Hours(L70)	<b>12.5W LED ARRAY</b> <b>30K</b> - 3000K Color Temp.  - 80 CRI Typ. - 1090 LED Lumens (808 Fixture Lumens) - Estimated 65 Lumens Per Watt	<b>12.5W LED ARRAY</b> <b>35K</b> - 3500K Color Temp.  - 80 CRI Typ. - 1124 LED Lumens (833 Fixture Lumens) - Estimated 67 Lumens Per Watt	<b>12.5W LED ARRAY</b> <b>40K</b> - 4000K Color Temp.  - 80 CRI Typ. - 1133 LED Lumens (840 Fixture Lumens) - Estimated 67 Lumens Per Watt
	<b>L25.0</b> - (72) LED Array - Constant Current @350mA - 25.0 Input Watts  50,000 Hours(L70)	<b>25.0W LED ARRAY</b> <b>30K</b> - 3000K Color Temp.  - 80 CRI Typ. - 2165 LED Lumens (1513 Fixture Lumens) - Estimated 61 Lumens Per Watt	<b>25.0W LED ARRAY</b> <b>35K</b> - 3500K Color Temp.  - 80 CRI Typ. - 2233 LED Lumens (1560 Fixture Lumens) - Estimated 62 Lumens Per Watt	<b>25.0W LED ARRAY</b> <b>40K</b> - 4000K Color Temp.  - 80 CRI Typ. - 2250 LED Lumens (1572 Fixture Lumens) - Estimated 63 Lumens Per Watt

ARRA 2009



VANDAL RESISTANT

BUY AMERICA ACT