

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

MAXFLI LED




FEATURES

- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Clear Ribbed Polycarbonate Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- ADA Compliant
- CSA Listed Wet Location For Wall or Ceiling Mount
- 120V Drivers Are Dimmable
- 277V Drivers Are Not Dimmable
- Awaiting IES Files, Lighting Facts, And Title 24 Labeling / Certification

DIMMING FEATURES

- Dimmable to <5%
- Dimmable With Either Triac or Electronic Dimmers
- Over-Current, Over-Voltage, and Short Circuit Protection
- Constant Current at 350 Milliamps
- UL Class 2 Driver - Power Factor >.90
- Estimated 50,000 Hours Life (L70)

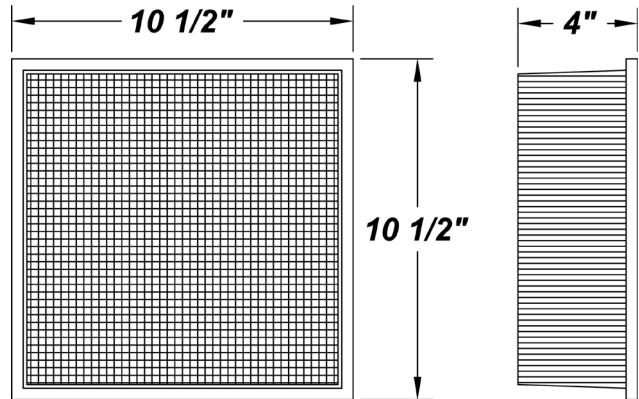

ORDERING INFORMATION

Example : (Mi - L12.5 - 277V - WPL - 41K) White is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	FINISH	OPTIONS
Maxfli	L12.5 - (36) LED Array	120V - 120V 277V - 277V (50 / 60Hz)	CPL - Clear Polycarbonate (Standard) WPL - White Polycarbonate	Not Applicable	27K - 12.5W Has 713 Fixture Lumens (Estimated 57 Fixture Lumens Per Watt) 30K - 12.5W Has 743 Fixture Lumens (Estimated 59.4 Fixture Lumens Per Watt) 35K - 12.5W Has 766 Fixture Lumens (Estimated 61.2 Fixture Lumens Per Watt) 40K - 12.5W Has 772 Fixture Lumens (Estimated 61.8 Fixture Lumens Per Watt) PCL - 120 or 277V PCL F - Fused

REPLACEMENT PARTS PART NO.

Clear Polycarbonate Diffuser	34191
White Polycarbonate Diffuser	3419160

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

Please Note: All Lumen Information is For Estimation / Specification Purposes Only.
Once Proper Certifications Are Received, The Data Will be Updated Accordingly.

PRODUCT	SOURCE/WATTAGE	27K SPECIFICATIONS	30K SPECIFICATIONS	35K SPECIFICATIONS	40K SPECIFICATIONS
Maxfli	L12.5 - (36) LED Array - Constant Current @350mA - 12.5 Input Watts 50,000 Hours(L70)	12.5W LED ARRAY 27K - 2700K Color Temp. - 80 CRI Typ. - 1046 LED Lumens (713 Fixture Lumens) - Estimated 57 Lumens Per Watt	12.5W LED ARRAY 30K - 3000K Color Temp. - 80 CRI Typ. - 1090 LED Lumens (743 Fixture Lumens) - Estimated 59 Lumens Per Watt	12.5W LED ARRAY 35K - 3500K Color Temp. - 80 CRI Typ. - 1124 LED Lumens (766 Fixture Lumens) - Estimated 61 Lumens Per Watt	12.5W LED ARRAY 40K - 4000K Color Temp. - 80 CRI Typ. - 1133 LED Lumens (772 Fixture Lumens) - Estimated 62 Lumens Per Watt

ARRA 2009



BUY AMERICA ACT C US