


**BIRDIE POLY ROUND LED**



PROJECT :  
 TYPE :  
 ORDERING # :  
 COMMENTS :

**FEATURES**

- White or Black Polycarbonate Housing
- White or Black Polycarbonate Fascia
- Aluminum Back Pan w/ Powder Coat Finish
- Frosted White Polycarbonate Lens
- Ambient Operating Temperature -40° C (-40° F) to 40° C (105° F)
- Constant Current at 700 Milliamps
- UL Class 2 Driver - Power Factor >.90
- Estimated 50,000 Hours Life (L70)
- Thermal Protected LED Array
- Mounting Hardware Included
- UL Listed Wet Location
- Wall or Ceiling Mount

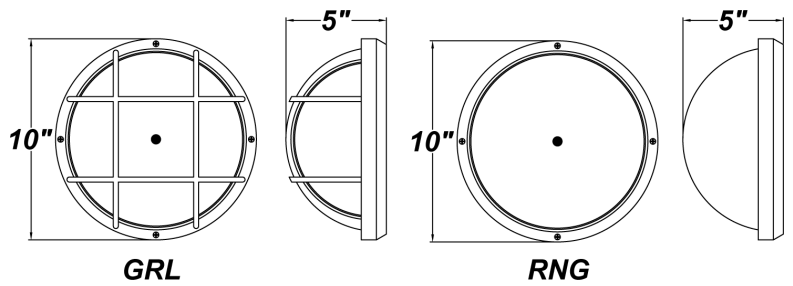

**ORDERING INFORMATION**

Example : (BER - L18.0 - 100 - 277V - GRL - BK - 40K)

PRODUCT	SOURCE/WATTAGE	VOLTAGE	FASCIA	FINISH	OPTIONS
Birdie Poly Round	L18.0 - (8) LED Array  50,000 Hours(L70)  Please See "Options" Column For Specifications	100 - 277V (50 / 60Hz) Please See "Options" Column For Driver Specifications	GRL - Grill (Standard) RNG - Ring	WH - White Polycarbonate BK - Black Polycarbonate	<b>18.0W LED ARRAY</b> <b>40K - 4000K Color Temp.</b> - 74 CRI Typ. - Constant Current at 700 Milliamps By Driver - 22W Input = 1824 Lumens - Estimated 82 Lumens Per Watt TP - Tamper Resistant Screws PCL120 - Photocell 120V PCL277 - Photocell 277V

**REPLACEMENT PARTS PART NO.**

White Polycarbonate Lens	3400760
Birdie Poly Round White GRL Fascia	5510602
Birdie Poly Round Black GRL Fascia	5510601
Birdie Poly Round White RNG Fascia	5510002
Birdie Poly Round Black RNG Fascia	5510001

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

