



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

APPLEBY LED

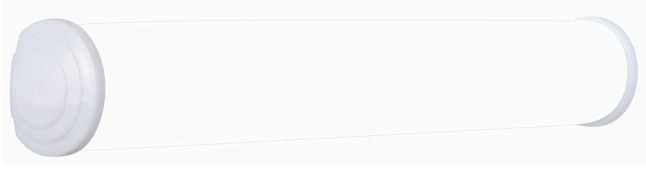

FEATURES

- Aluminum Housing w/ White Powder Coat Finish
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- White Marble Acrylic End Caps
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Constant Current, Dimmable to 10% From 120V to 230V
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

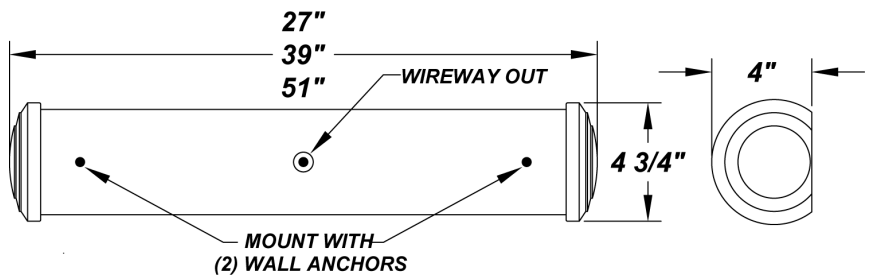

ORDERING INFORMATION

Example : (AY24 - L18.0 - 120-277V - TE500 - 30K) White Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	FINISH	OPTIONS
AY24 (27" Fixture)	L12.0 - 12W LED Strip(s)	120 - 277V (120 - 230V Dimmable)	TE350 - 350mA ELV Low Voltage Dimming Electronic Driver (For L12.0)	Not Applicable	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. F - Fused
	L18.0 - 18W LED Strip(s)		TE500 - 500mA ELV Low Voltage Dimming Electronic Driver (For L18.0)		
	L20.6 - 20.6W LED Strip(s)		ZE500 - 500mA Low Voltage Dimming Electronic Driver (For L18.0) (Dimmable 0 - 10V)		
	L70 life time for 50,000hr		ZE600 - 600mA Low Voltage Dimming Electronic Driver (For L20.6) (Dimmable 0 - 10V)		

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.


REPLACEMENT PARTS PART NO.

24" White Acrylic w/ White Marble LED Lens Assembly	3821154
36" White Acrylic w/ White Marble LED Lens Assembly	3822354
48" White Acrylic w/ White Marble LED Lens Assembly	3821254




PROJECT :
TYPE :
ORDERING # :
COMMENTS :

APPLEBY LED

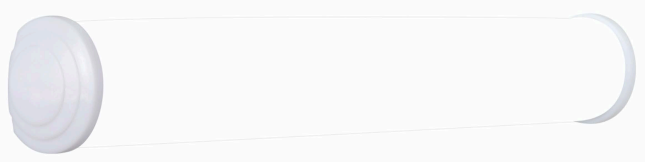

FEATURES

- Aluminum Housing w/ White Powder Coat Finish
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- White Marble Acrylic End Caps
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Constant Current, Dimmable to 10% From 120V to 230V
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

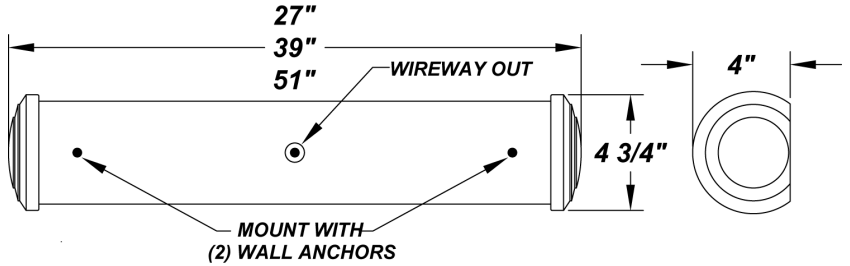

ORDERING INFORMATION

Example : (AY24 - L18.0 - 120-277V - LE500 - 30K) White Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	FINISH	OPTIONS
AY36 (39" Fixture)	L23.2 - 23.2W LED Strip(s)	120 - 277V	TE700 - 700mA ELV Low Voltage Dimming Electronic Driver (For L23.2)	Not Applicable	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. F - Fused
	L30.0 - 30W LED Strip(s)	(120 - 230V Dimmable)	ZE700 - 700mA Low Voltage Dimming Electronic Driver (For L23.2) (Dimmable 0 - 10V)		
			TE875 - 875mA ELV Low Voltage Dimming Electronic Driver (For L30.0)		
			ZE875 - 875mA Low Voltage Dimming Electronic Driver (For L30.0) (Dimmable 0 - 10V)		

REPLACEMENT PARTS PART NO.

24" White Acrylic w/ White Marble LED Lens Assembly	3821154
36" White Acrylic w/ White Marble LED Lens Assembly	3822354
48" White Acrylic w/ White Marble LED Lens Assembly	3821254


NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.




PROJECT :
TYPE :
ORDERING # :
COMMENTS :

APPLEBY LED

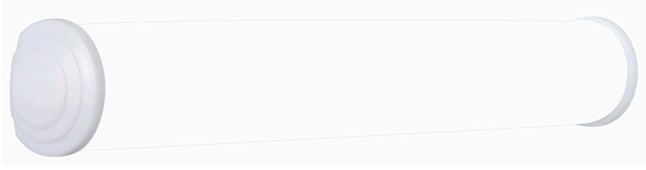

FEATURES

- Aluminum Housing w/ White Powder Coat Finish
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- White Marble Acrylic End Caps
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Constant Current, Dimmable to 10% From 120V to 230V
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

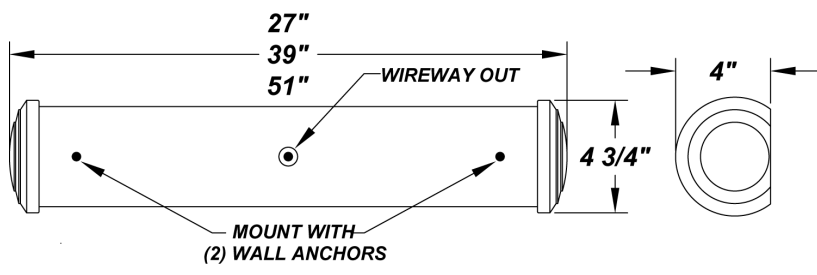

ORDERING INFORMATION

Example : (AY24 - L18.0 - 120 - 277V - LE500 - 30K) White Marble is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	FINISH	OPTIONS
AY48 (51" Fixture)	L24.0 - 24W LED Strip(s)	120 - 277V (120 - 230V Dimmable)	TE350 - 350mA ELV Low Voltage Dimming Electronic Driver (Standard For L24.0)	Not Applicable	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. F - Fused
	L36.0 - 36W LED Strip(s)		TE500 - 500mA ELV Low Voltage Dimming Electronic Driver (Standard For L36.0)		
	L41.2 - 41.2W LED Strip(s)		ZE500 - 500mA Low Voltage Dimming Electronic Driver (For L36.0) (Dimmable 0 - 10V)		
			ZE600 - 600mA Low Voltage Dimming Electronic Driver (For L41.2) (Dimmable 0 - 10V)		

REPLACEMENT PARTS **PART NO.**

24" White Acrylic w/ White Marble LED Lens Assembly	3821154
36" White Acrylic w/ White Marble LED Lens Assembly	3822354
48" White Acrylic w/ White Marble LED Lens Assembly	3821254

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Appleby 2'	L12.0 - 12.0W LED Strip(s) - Constant Current 350 Milliamps Driver - 14W Input	<u>L12.0</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 1400 LED Source Lumens - 100 LED Source Lumens Per Watt
	L18.0 - 18.0W LED Strip(s) - Constant Current 500 Milliamps Driver - 20W Input	<u>L18.0</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 1986 LED Source Lumens - 99 LED Source Lumens Per Watt
	L20.6 - 20.6W LED Strip(s) - Constant Current 600 Milliamps Driver - 25W Input	<u>L20.6</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 2050 LED Lumens - 82 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Appleby 4'	L24.0 - 24W LED Strip(s) - Constant Current 350 Milliamps Driver - 28W Input	<u>L24.0</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 2800 LED Source Lumens - 100 Source Lumens Per Watt
	L36.0 - 36W LED Strip(s) - Constant Current 500 Milliamps Driver - 40W Input	<u>L36.0</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - Constant Current 500 Milliamps Driver - 3972 LED Source Lumens - 99 Source Lumens Per Watt
	L41.2 - 41.2W LED Strip(s) - Constant Current 600 Milliamps Driver - 43W Input	<u>L41.2</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - Constant Current 600 Milliamps Driver - 5578 LED Source Lumens - 129.7 Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Appleby 3'	L23.2 - 23.2W LED Strip(s) - Constant Current 700 Milliamps Driver - 28.4W Input	<u>L23.2</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 3258 LED Lumens - 114.7 LED Source Lumens Per Watt
	L30.0 - 30.0W LED Strip(s) - Constant Current 875 Milliamps Driver - 37W Input	<u>L30.0</u> 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 4072 LED Lumens - Estimated 110.1 Lumens Per Watt

