


PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**AZINGER LED**



**FEATURES**

- Steel Trim w/ Swedish Steel Powder Coat Finish
- Aluminum Housing w/ White Powder Coat Finish
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Constant Current, Dimmable to 10% From 120V to 230V
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

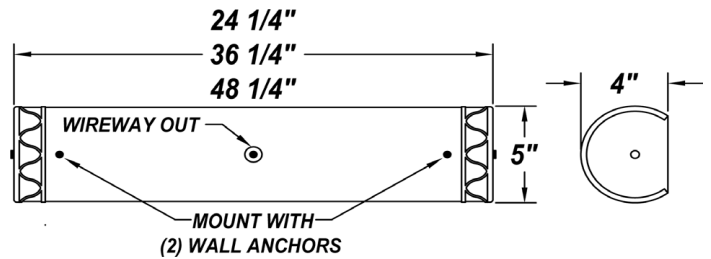

**ORDERING INFORMATION**

Example : (AR24 - L12.0 - 120-277V - TE350 - AC - 35K) Swedish Steel is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	FINISH	OPTIONS
AR24 (24" Fixture)	L12.0 - 12W LED Strip(s)	120 - 277V  (120 - 230V Dimmable)	TE350 - 350mA ELV Low Voltage Dimming Electronic Driver (For L12.0)	SM - Matte Silver	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp.  F - Fused
	L18.0 - 18W LED Strip(s)		TE500 - 500mA ELV Low Voltage Dimming Electronic Driver (For L18.0)	TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper	
	L20.6 - 20.6W LED Strip(s)		ZE500 - 500mA Low Voltage Dimming Electronic Driver (For L18.0) (Dimmable 0 - 10V)	SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White	
	L70 life time for 50,000hr		ZE600 - 600mA Low Voltage Dimming Electronic Driver (For L20.6) (Dimmable 0 - 10V)	RAL Colors or Custom Match - Consult Factory	

**REPLACEMENT PARTS PART NO.**

24" White Acrylic LED Lens Assembly	38209
36" White Acrylic LED Lens Assembly	38215
48" White Acrylic LED Lens Assembly	38210

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.


PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**AZINGER LED**



**FEATURES**

- Steel Trim w/ Swedish Steel Powder Coat Finish
- Aluminum Housing w/ White Powder Coat Finish
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Constant Current, Dimmable to 10% From 120V to 230V
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount

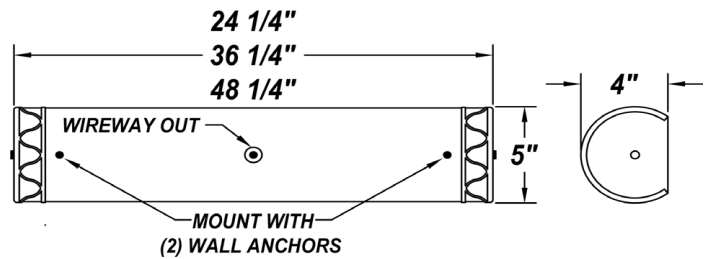

**ORDERING INFORMATION**

Example : (AR36 - L30.0 - 120-277V - TE875 - AC - 35K) Swedish Steel is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	FINISH	OPTIONS
AR36 (36 1/4" Fixture)	L23.2 - 23.2W LED Strip(s)	120 - 277V	TE700 - 700mA ELV Low Voltage Dimming Electronic Driver (For L23.2)	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist CP - Copper SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White  RAL Colors or Custom Match - Consult Factory	40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp.  F - Fused
	L30.0 - 30W LED Strip(s)	(120 - 230V Dimmable)	ZE700 - 700mA Low Voltage Dimming Electronic Driver (For L23.2) (Dimmable 0 - 10V)		
			TE875 - 875mA ELV Low Voltage Dimming Electronic Driver (For L30.0)		
			ZE875 - 875mA Low Voltage Dimming Electronic Driver (For L30.0) (Dimmable 0 - 10V)		

**REPLACEMENT PARTS PART NO.**

24" White Acrylic LED Lens Assembly	38209
36" White Acrylic LED Lens Assembly	38215
48" White Acrylic LED Lens Assembly	38210

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.


PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**AZINGER LED**



**FEATURES**

- Steel Trim w/ Swedish Steel Powder Coat Finish
- Aluminum Housing w/ White Powder Coat Finish
- Aluminum Reflector w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- ELV Driver - Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- Constant Current, Dimmable to 10% From 120V to 230V
- Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- ADA Compliant
- CSA Listed Damp Location For Surface Mount
- Awaiting IES Files, Lighting Facts, And Title 24 Labeling / Certification

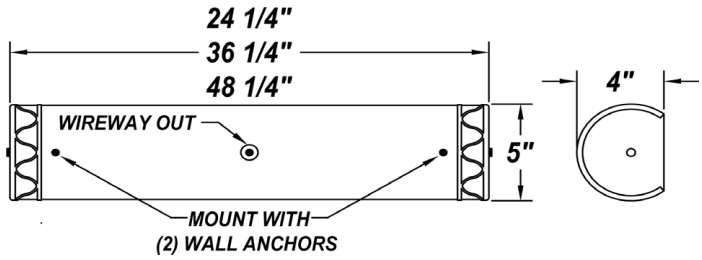

**ORDERING INFORMATION**

Example : (AR48 - L41.2 - 120-277V - ZE600 - AC - 35K) Swedish Steel is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	FINISH	OPTIONS
AR48 (48 1/4" Fixture)	L24.0 - 24W LED Strip(s)	120 - 277V	TE350 - 350mA ELV Low Voltage Dimming Electronic Driver (Standard For L24.0)	SM - Matte Silver	40K - 4000K Color Temp.
	L36.0 - 36W LED Strip(s)	(120 - 230V Dimmable)	TE500 - 500mA ELV Low Voltage Dimming Electronic Driver (Standard For L36.0)	TB - Textured Black	35K - 3500K Color Temp.
	L41.2 - 41.2W LED Strip(s)		ZE500 - 600mA Low Voltage Dimming Electronic Driver (For L36.0) (Dimmable 0 - 10V)	AC - Antique Copper	30K - 3000K Color Temp.
			ZE600 - 600mA Low Voltage Dimming Electronic Driver (For L41.2) (Dimmable 0 - 10V)	AS - Antique Silver	F - Fused
				BT - Bronze Mist	
				CP - Copper	
				SN - Sand	
				SW - Swedish Steel	
				BZ - Textured Bronze	
				TW - Textured White	
				RAL Colors or Custom Match - Consult Factory	

**REPLACEMENT PARTS PART NO.**

24" White Acrylic LED Lens Assembly	38209
36" White Acrylic LED Lens Assembly	38215
48" White Acrylic LED Lens Assembly	38210

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Azinger 2'	<b>L12.0</b> - 12.0W LED Strip(s) - Constant Current 350 Milliamps Driver - 14W Input	<u><b>L12.0</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 1400 LED Source Lumens - 100 LED Source Lumens Per Watt
	<b>L18.0</b> - 18.0W LED Strip(s) - Constant Current 500 Milliamps Driver - 20W Input	<u><b>L18.0</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 1986 LED Source Lumens - 99 LED Source Lumens Per Watt
	<b>L20.6</b> - 20.6W LED Strip(s) - Constant Current 600 Milliamps Driver - 25W Input	<u><b>L20.6</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 2050 LED Source Lumens - 82 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Azinger 4'	<b>L24.0</b> - 24W LED Strip(s) - Constant Current 350 Milliamps Driver - 28W Input	<u><b>L24.0</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 2800 LED Source Lumens - 100 LED Source Lumens Per Watt
	<b>L36.0</b> - 36W LED Strip(s) - Constant Current 500 Milliamps Driver - 40W Input	<u><b>L36.0</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 3972 LED Source Lumens - 99 LED Source Lumens Per Watt
	<b>L41.2</b> - 41.2W LED Strip(s) - Constant Current 600 Milliamps Driver - 43W Input	<u><b>L41.2</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 5578 LED Source Lumens - 129.7 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Azinger 3'	<b>L23.2</b> - 23.2W LED Strip(s) - Constant Current 700 Milliamps Driver - 28.4W Input	<u><b>L23.2</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 3258 LED Source Lumens - 114.7 LED Source Lumens Per Watt
	<b>L30.0</b> - 30.0W LED Strip(s) - Constant Current 875 Milliamps Driver - 37W Input	<u><b>L30.0</b></u> <b>30K</b> - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 4072 Source LED Lumens - 110.1 Source Lumens Per Watt

