


**FALDO W LED**



PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Steel Housing w/ Textured Black Polyester Powder Coat Finish
- Aluminum Heat-Sink Plate
- Solid Top & Bottom End Plates
- Luminous White Acrylic Panels
- 100V - 277V
- Surge Protector
- CSA Listed Wet Location
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- ADA Compliant

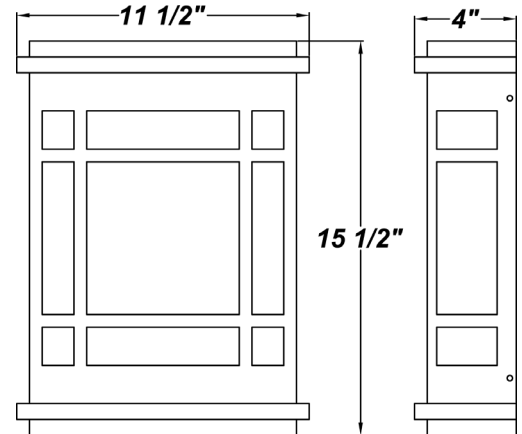

**ORDERING INFORMATION**

Example : (FLW - L37.0 - WAL - ZE1100 - TB - 50K)

Textured Black is Standard Finish

FLW						
PRODUCT	SOURCE/WATTAGE	VOLTAGE	DIFFUSER	DRIVER OPTIONS	FINISH	OPTIONS
Faldo W	L19.0 - 19.0W LED Strips  L37.0 - 37.0W LED Strips	120 - 277V  (120 - 230V Dimmable)	WAL - White Acrylic	ZE600 - 600mA Low Voltage Dimming Electronic Driver (For L19.0) (Dimmable 0 - 10V)  ZE1100 - 1100mA Low Voltage Dimming Electronic Driver (For L37.0) (Dimmable 0 - 10V)	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White MB - Metallic Black  RAL Colors or Custom Match - Consult Factory	50K - 5000K Color Temp. 40K - 4000K Color Temp. 35K - 3500K Color Temp. 30K - 3000K Color Temp. 27K - 2700K Color Temp. TP - Tamper-Proof Screws F - Fused EBW- Bodine BSL26 - Up To 5.1W Emergency Illumination With LEDs (Available For L37.0 Only) (Please Specify Voltage) - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens EBC - Iota ILB-CP12-B Integral 12W LED Driver (Available For L19.0 Only) (Please Specify Voltage)

SOURCE/WATTAGE	30K SPECIFICATIONS
L19.0 - 19.0W LED Strips - 19.0W Input - Voltage Regulated at 12 Volts by Driver	<b>L19.0 - 19.0W LED Strips</b> <b>30K - 3000K Color Temp.</b> - Color Temp = 3000K Nominal - 80 CRI typ. (75 CRI min) - 2980 LED Source Lumens - 156.8 LED Source Lumens Per Watt
L37.0 - 37.0W LED Strips - 37.0W Input - Voltage Regulated at 12 Volts by Driver	<b>L37.0 - 37.0W LED Strips</b> <b>30K - 3000K Color Temp.</b> - Color Temp = 3000K Nominal - 80 CRI typ. (75 CRI min) - 3835 LED Source Lumens - 103.6 LED Source Lumens Per Watt

REPLACEMENT PARTS	PART NO.
White Acrylic Lens Panel Set	9800660

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

