



GUARDIAN W LED

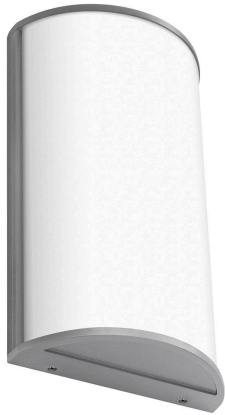

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Extruded Aluminum Housing w/ Matte Silver Polyester Powder Coat Finish
- Die Cast Aluminum End Caps w/ Matte Silver Polyester Powder Coat Finish
- High Impact White Acrylic Diffuser (50% DR Acrylic) w/ Inner Frosted Diffuser
- Aluminum LED Mounting Plate
- Recessed Stainless Steel Screws
- Fixture Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery (For 24.5W Only)
- 120V - 277V, Plus 347V For Selected Wattages
- Surge Protector (For L24.5 , L12.0 & L18.0 Only)
- CSA Listed Wet Location For Wall Mount Only
- ADA Compliant

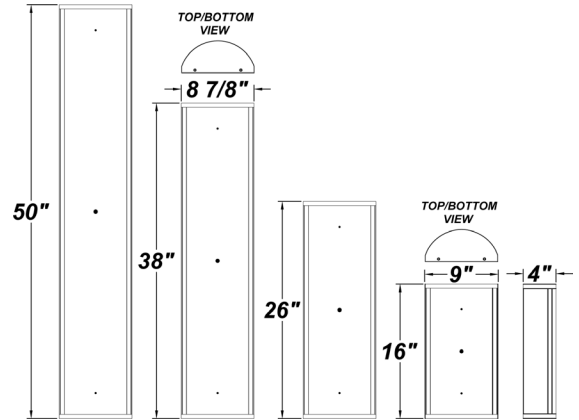

ORDERING INFORMATION

Example : (GRDW - L24.5 - 120-277V - 12CV - WAL - TB - 50K)

Matte Silver is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Guardian W 16" (GRDW)	L12.0 - 12W LED Strip(s) L18.0 - 18W LED Strip(s) L24.5 - 24.5W LED Strip(s)	120 - 277V (L18.0 is Dimmable From 120 - 230V) (120 - 277V Dimmable For 0-10V)	12CV - 12V Constant Voltage Non-Dimming Electronic Driver (For L24.5) TE350 - 350mA ELV Low Voltage 2-Wire Electronic Driver (For L12.0) ZE350 - 350mA Line Voltage 4-Wire Dimming Driver (For L12.0) (Dimmable 0 - 10V) TE500 - 500mA ELV Low Voltage 2-Wire Electronic Driver (For L18.0) LE500 - 500mA Line Voltage 2-Wire Dimming Driver (For L18.0) (120V Only)	WAL - White Acrylic Lens	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White MB - Metallic Black RAL Colors or Custom Match - Consult Factory	30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. 51K - 5100K Color Temp. OEL - Single End Window TEL - Twin End Windows (Both Ends) EB10 - Iota ILB-CP10-B Integral 10W LED Driver For 2' Fixture EB Option, Please Consult Factory for Mount Hole and Wireway Locations
Guardian W 2' (GRDW24)	L18.0 - 18W LED Strip(s) L36.5 - 36.5W LED Strip(s) * L46.5 - 46.5W LED Strip(s) L49.5 - 49.5W LED Strip(s) L70 life time for 50,000hr * Available in 347V	347V Available For L36.5 Only (Of Wattages Listed On This Page) (L36.5 is Dimmable For 0-10V)	ZE500 - 500mA Low Voltage Dimming Electronic Driver (For L18.0) (Dimmable 0 - 10V) ZE1050 - 1050mA Line Voltage 4-Wire Dimming Driver (For L36.5) (Dimmable 0 - 10V) ZE1100 - 1100mA Line Voltage 4-Wire Dimming Driver (For L46.5) (Dimmable 0 - 10V) ZE1150 - 1150mA Line Voltage 4-Wire Dimming Driver (For L49.5) (Dimmable 0 - 10V)			

REPLACEMENT PARTS PART NO.


16" Acrylic LED Lens Assembly	38200
2' Acrylic LED Lens Assembly	38216

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.




GUARDIAN W LED

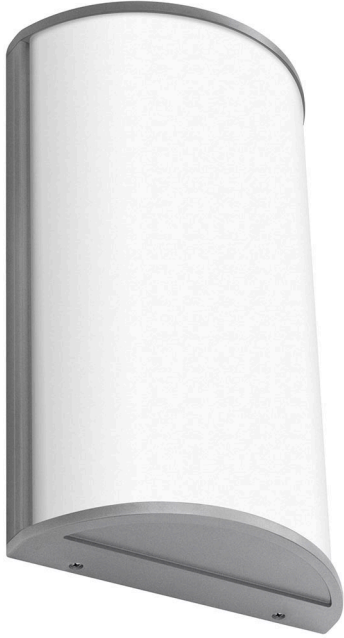

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

FEATURES

- Extruded Aluminum Housing w/ Matte Silver Polyester Powder Coat Finish
- Aluminum Fascia w/ Matte Silver Polyester Powder Coat Finish
- Die Cast Aluminum End Caps w/ Matte Silver Polyester Powder Coat Finish
- High Impact White Acrylic Diffuser (50% DR Acrylic)
- Steel Reflector w/ Hi-Reflectance White Powder Coat Finish
- Recessed Steel Screws
- Fixture Mounts Directly to Surface w/ Two Wall Anchors (Not Included)
- Over-Voltage, Over-Current, and Short-Circuit Protection w/ Auto Recovery
- 120V - 277V, Plus 347V For Selected Wattages
- Surge Protector
- CSA Listed Wet Location For Wall Mount Only
- ADA Compliant

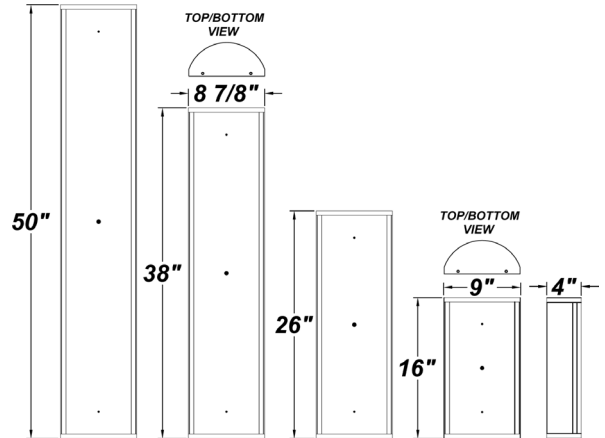

ORDERING INFORMATION

Example : (GRDW36 - L72.0 - 120-277V - ZE714 - WAL - SW - 40K)

Matte Silver is Standard Finish

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Guardian W 3' (GRDW36)	L36.5 - 36.5W LED Strip(s) L72.0 - 72.0W LED Strip(s)	120 - 277V (120 - 347V Dimmable For 0-10V)	ZE714 - 700mA & 1400mA Line Voltage 4-Wire Dimming Driver (For L72.0) (Dimmable 0 - 10V)	WAL - White Acrylic Lens	SM - Matte Silver TB - Textured Black AC - Antique Copper AS - Antique Silver BT - Bronze Mist SN - Sand SW - Swedish Steel BZ - Textured Bronze TW - Textured White MB - Metallic Black	30K - 3000K Color Temp. 35K - 3500K Color Temp. 40K - 4000K Color Temp. OEL - Single End Window TEL - Twin End Windows (Both Ends) EB - Iota ILB-CP10 12W LED Driver (Available For 3' & 4' Models) EB - Iota ILB-CP10 12W LED Driver (Available For 3' & 4' Models)
Guardian W 4' (GRDW48)	L70.0 - 70.0W LED Strip(s) * L75.0 - 75.0W LED Strip(s) L70 life time for 50,000hr * Available in 347V	347V Available For L70.0 Only (Of Wattages Listed On This Page)	ZE1050 - 1050mA Line Voltage 4-Wire Dimming Driver (For L36.5 & L70.0) (Dimmable 0 - 10V) ZE1100 - 1100mA Line Voltage 4-Wire Dimming Driver (For L75.0) (Dimmable 0 - 10V)		RAL Colors or Custom Match - Consult Factory	

REPLACEMENT PARTS PART NO.

3' Acrylic LED Lens Assembly	38217
4' Acrylic LED Lens Assembly	38218

NOTES

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Guardian W 16"	L24.5 - 24.5W LED Strip(s) - Constant Voltage at 12 Volts by Driver - 24.5W Input	Eight 3.066W LED Strips 30K - 3000K Color Temp. - 9 LEDs Per Module - SW30Bin, Color Temp = 3000K Nominal - 2528 LED Source Lumens - 103.2 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Guardian W 3'	L72.0 - 72.0W LED Strip(s) - Constant Current 1400 Milliamps Driver & 700 Milliamps Driver - 72.0W Input	L72.0 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 10437 LED Source Lumens - 145 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Guardian W 16" & 2'	L18.0 - 18.0W LED Strip(s) - Constant Current 500 Milliamps Driver - 18.0W Input	L18.0 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 2711 LED Source Lumens - 150.6 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Guardian W 4'	L70.0 - 70.0W LED Strip(s) - Constant Current 1050 Milliamps Driver - 70.0W Input L75.0 - 75.0W LED Strip(s) - Constant Current 1100 Milliamps Driver - 75.0W Input	L70.0 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 5693 LED Source Lumens - 81.3 LED Source Lumens Per Watt L75.0 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 5964 LED Source Lumens - 79.5 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Guardian W 2' & 3'	L36.5 - 36.5W LED Strip(s) - Constant Current 1050 Milliamps Driver - 36.5W Input L46.5 - 46.5W LED Strip(s) - Constant Current 1100 Milliamps Driver - 46.5W Input L49.5 - 49.5W LED Strip(s) - Constant Current 1150 Milliamps Driver - 49.5W Input	L36.5 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 5993 LED Source Lumens - 156 LED Source Lumens Per Watt L46.5 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 5963 LED Source Lumens - 128.2 LED Source Lumens Per Watt L49.5 30K - 3000K Color Temp. - 34 fV, Color Temp = 3000K Nominal - 6234 LED Source Lumens - 126 LED Source Lumens Per Watt

