

**EAGLE PRF LED**






**Please Note:** For Mount Pan Finishes, Contact Factory For Ordering Code And Pricing

PROJECT :
TYPE :
ORDERING # :
COMMENTS :

**FEATURES**

- Aluminum Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- Luminous White Acrylic Diffuser
- Mounts Directly to 4" Junction Box (By Others)
- Mounting Hardware Included
- ADA Compliant
- CSA Listed Damp Location Wall & Ceiling (Ceiling only w/Back Box)

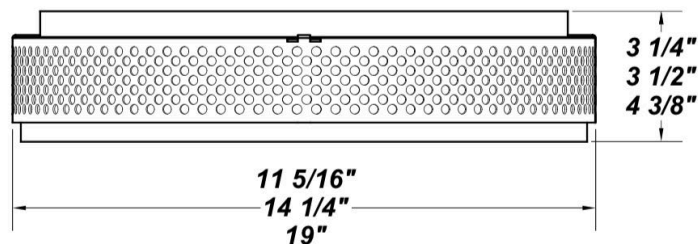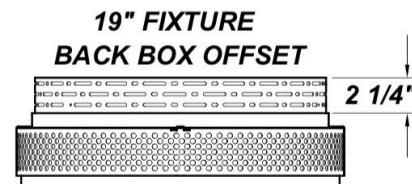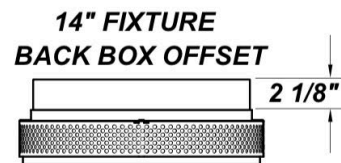

**ORDERING INFORMATION**

**Example : (EE - PRF - L13.0 - 120-277V - ZE560 - WAL - SM - 30K)**

**Matte Silver is Standard Finish**

PRODUCT	SOURCE/WATTAGE	VOLTAGE	DRIVER OPTIONS	DIFFUSER	FINISH	OPTIONS
Eagle PRF 11" Fixture	L13.0 - (48) LED Array	120 - 277V (50 / 60Hz)	<b>ZE560</b> - Line Voltage 4-Wire Dimming Driver <b>(For L13.0 &amp; 16.3 Only)</b> <b>(Dimmable 0 - 10V)</b>  <b>ZE700</b> - Line Voltage 4-Wire Dimming Driver <b>(For L21.0 Only)</b> <b>(Dimmable 0 - 10V)</b>  <b>ZE1000</b> - Line Voltage 4-Wire Dimming Driver <b>(For L30.0 Only)</b> <b>(Dimmable 0 - 10V)</b>  <b>ZE1050</b> - Line Voltage 4-Wire Dimming Driver <b>(For L37.5 Only)</b> <b>(Dimmable 0 - 10V)</b>	<b>WAL</b> - White Acrylic <b>WLL</b> - White Acrylic Formulated For LED Fixtures <b>WPL</b> - White Polycarbonate	<b>SM</b> - Matte Silver <b>TB</b> - Textured Black <b>AC</b> - Antique Copper <b>AS</b> - Antique Silver <b>BT</b> - Bronze Mist <b>SN</b> - Sand <b>SW</b> - Swedish Steel <b>BZ</b> - Textured Bronze <b>TW</b> - Textured White <b>MB</b> - Metallic Black  <b>RAL Colors or Custom Match - Consult Factory</b>	<b>27K</b> - 2700K Color Temperature <b>30K</b> - 3000K Color Temperature <b>35K</b> - 3500K Color Temperature <b>40K</b> - 4000K Color Temperature <b>MSI</b> - MSI-FM105 120/277V <b>F</b> - Fused <b>EB/BB</b> - Bodine BSL26 - Up to 5.1W Emergency Illumination With LEDs (Back Box Required) (14" & 19" Fixtures Only) - AC Mode 960 Lumens - Battery @ 1 second = 322 Total Lumens - Battery @ 90 Minutes = 291 Total Lumens <b>(Please Specify Voltage)</b> <b>BB</b> - Back Box for 14" or 19" Fixture
Eagle PRF 14" Fixture	L16.3 - (60) LED Array L21.0 - (60) LED Array					
Eagle PRF 19" Fixture	L21.0-19H - (60) LED Array L30.0 - (60) LED Array L37.5 - (120) LED Array					

**REPLACEMENT PARTS PART NO.**

11" White Acrylic Diffuser	3011360
14" White Acrylic Diffuser	3011560
19" White Acrylic Diffuser	3011960
11" White Acrylic LED Diffuser	3053060
14" White Acrylic LED Diffuser	3053160
19" White Acrylic LED Diffuser	3067560

**NOTES**

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.





PROJECT :
TYPE :
ORDERING # :
COMMENTS :

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Eagle PRF 11" & 14" (With WAL Standard Lens)	L13.0 - (48) LED Array - Constant Current @560mA - 13.0 Input Watts  50,000 Hours(L70)	<b>13.0 LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 1700 LED Source Lumens - 105 LED Source Lumens Per Watt
Eagle PRF 11" & 14" (With WLL LED Lens)	L13.0 - (48) LED Array - Constant Current @560mA - 13.0 Input Watts  50,000 Hours(L70)	<b>13.0 LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 1700 LED Source Lumens - 105 LED Source Lumens Per Watt
Eagle PRF 14" (With WAL Standard Lens)	L16.3 - (60) LED Array - Constant Current @560mA - 16.3 Input Watts  50,000 Hours(L70)	<b>16.3W LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 2110 LED Source Lumens - 129.4 LED Source Lumens Per Watt
Eagle PRF 14" (With WLL LED Lens)	L16.3 - (60) LED Array - Constant Current @560mA - 16.3 Input Watts  50,000 Hours(L70)	<b>16.3W LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 2110 LED Source Lumens - 129.4 LED Source Lumens Per Watt
Eagle PRF 14" & 19" (With WAL Standard Lens)	L21.0 - (60) LED Array - Constant Current @700mA - 21.0 Input Watts  50,000 Hours(L70)	<b>21.0W LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 2640 LED Source Lumens - 126 LED Source Lumens Per Watt
Eagle PRF 14" & 19" (With WLL LED Lens)	L21.0 - (60) LED Array - Constant Current @700mA - 21.0 Input Watts  50,000 Hours(L70)	<b>21.0W LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 2640 LED Source Lumens - 126 LED Source Lumens Per Watt

PRODUCT	SOURCE/WATTAGE	30K SPECIFICATIONS
Eagle PRF 19" (With WAL Standard Lens)	L30.0 - (60) LED Array - Constant Current @1000mA - 30.0 Input Watts  50,000 Hours(L70)	<b>30.0W LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 4855 LED Source Lumens - 162 LED Source Lumens Per Watt
Eagle PRF 19" (With WLL LED Lens)	L30.0 - (60) LED Array - Constant Current @1000mA - 33.76 Input Watts  50,000 Hours(L70)	<b>30.0W LED ARRAY</b> 30K - 3000K Color Temp. - 80 CRI Typ. - 4855 LED Source Lumens - 162 LED Source Lumens Per Watt
Eagle PRF 19" (With WAL Lens)	L37.5 - (108) LED Array - Constant Current @350mA - 37.5 Input Watts  50,000 Hours(L70)	<b>37.5W LED ARRAY</b> 30K - 3000K Color Temp.  - 80 CRI Typ. - 4845 LED Source Lumens - 129.2 LED Source Lumens Per Watt
Eagle PRF 19" (With WLL Lens)	L37.5 - (108) LED Array - Constant Current @350mA - 37.5 Input Watts  50,000 Hours(L70)	<b>37.5W LED ARRAY</b> 30K - 3000K Color Temp.  - 80 CRI Typ. - 4845 LED Source Lumens - 129.2 LED Source Lumens Per Watt